

# **Installation Manual - TVH.2691**

# 3/4" Thermostatic Tub Filler Valve With Two Volume Controls

**Use With Trims Ending in \*2691** 



#### **BEFORE YOU BEGIN**

- You must observe all local plumbing laws and codes.
- Do not install this valve if it does not meet local plumbing codes.
- Shut off the main water supply.



#### **TABLE OF CONTENTS**

<ul> <li>Operating Specifications</li> </ul>	•	•	•	•	•	•	•	1
Valve Installation And Tolerance								
• Cut-Out Dimensions								1
<ul> <li>Rough In Specificati</li> </ul>	on							2
• Connecting The Supply & O	utput L	ines		•				3
• Trim Markings / Water Outp	ut							4
• Using The Supply Stops	•			•				5
• Flushing The Valve .				•				5
• Installing The Trim .								6
• Replacing The Thermostatic	Cartric	lge						10
• Replacing Volume Control C	Cartridg	e .		•				10
<ul> <li>Replacing Supply Stops</li> </ul>	•			•				11
• Installing The Extension Kit				•				12
Cartridge Maintenance								14

### **NOTICE TO HOMEOWNER**

- We recommend that this product is installed by a qualified professional plumber.
- Please check this product immediately to ensure that it has
  not been damaged and is complete. Before installation, please
  make sure this product is the correct model and you have all
  the parts required for installation and use.
- Please flush the water system to ensure that no metal swarf, solder, and other impurities can enter the product.
- Turn off water supply before commencing work.
- Please read these instructions carefully and retain for future reference.



#### **OPERATING SPECIFICATIONS**

#### WATER TEMPERATURE



This product is to be used with water at a temperature range of 40°F - 120°F ONLY!

#### **WATER PRESSURE**




This product is to be used with a water pressure range of 15 PSI to 80 PSI ONLY

If water pressure is greater than 80 PSI install a pressure reducing valve (PRV)

This valve meets or exceeds ANSI A112.18.1 and ASSE 1016

This valve is certified by IAPMO

#### **CUT OUT DIMENSIONS**

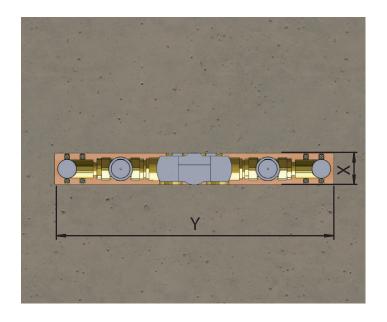

Isenberg's TVH Series valves comes with a black pre-attached mud-guard. This mud-guard is not to be removed or discarded. Its purpose is to guide the installation professional on the proper cut-out dimensions of the drywall.

Wall Cut Out Dimensions
From **Center Point** of Valve:


TVH.2691

X = 47 mm / 1.85"

Y = 417 mm / 16.41''




### **ROUGH IN SPECIFICATION**



The distance between back of the valve to the finished tile surface should be between 2.71" and 3.46" inches.


Finished tile should fall between Min & Max.

If valve is installed too deep into the wall, extensions are available.

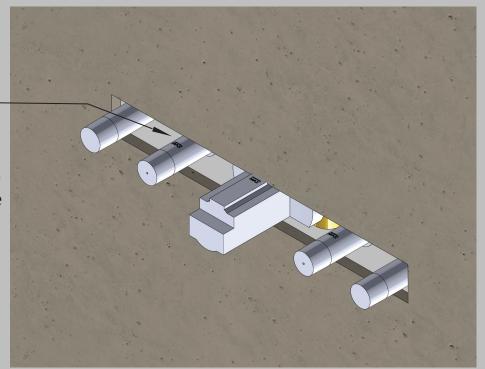





### **CONNECTING THE SUPPLY & OUTPUT LINES**

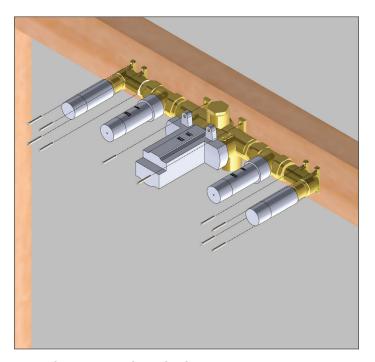

Fix Valve on wooden plank

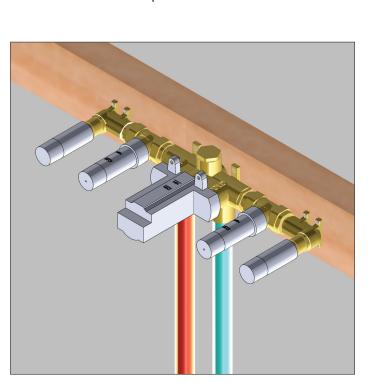


Attach Hot/Cold Lines

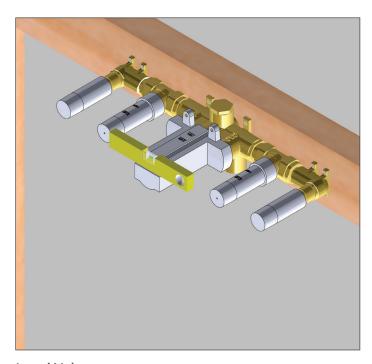

**Level Valve** 




#### **FINISH TILE POSITION**

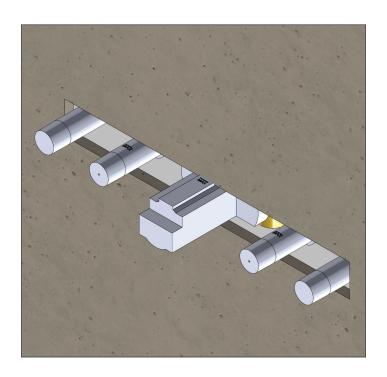

Install Drywall and Tile. Ensure finished tile surface is between the min and max marks on the mud guards.


#### TRIM MARKINGS / WATER OUTPUT

The below diagram shows the markings on the trim plate and the outputs on the valve. This will help the installation professional to connect the appropriate accessories to the valve output ports

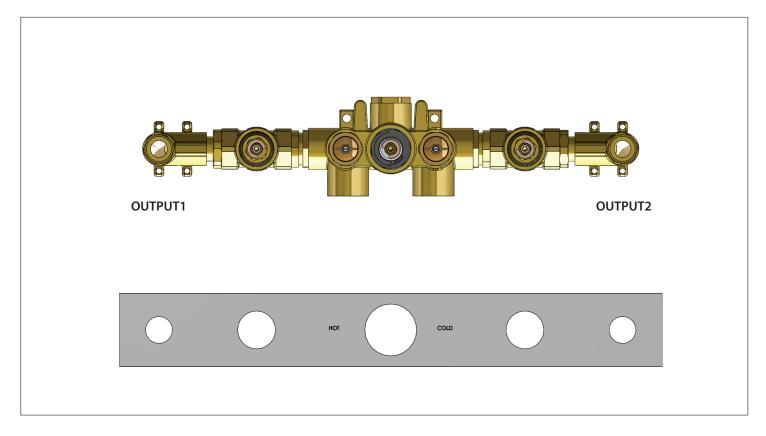



### **USING THE SUPPLY STOPS**

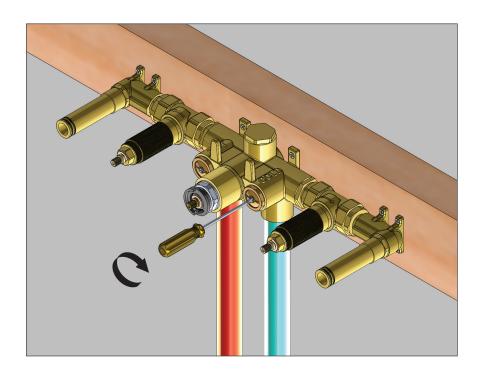


Turn Clock-wise 7 times to stop water flow.


#### **FLUSHING THE VALVE**

In order to clear dirt in the lines you must flush the valve before the wall is closed and water is turned on for the first time.

- 1) Remove the 2 supply stops by turning with a spanner
- 2) Remove thermostatic cartridge by turning with a spanner
- 3) Remove volume control cartridge by turning with a spanner
- 4) Turn on water supply and let water flow removing any dirt in the lines.

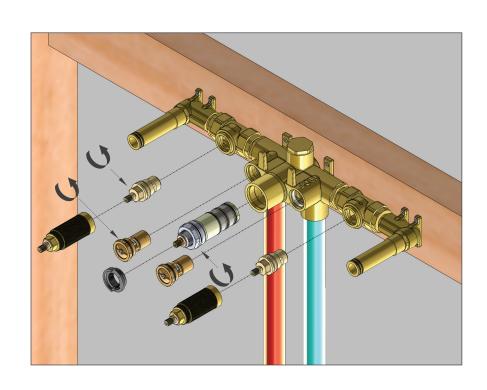




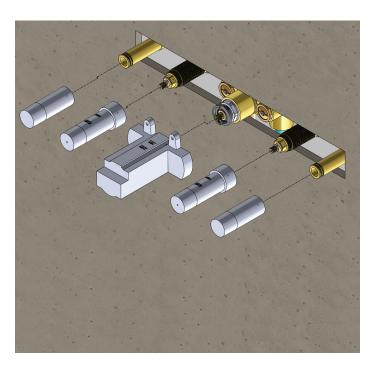


Remove mud guards



A hard push may be required

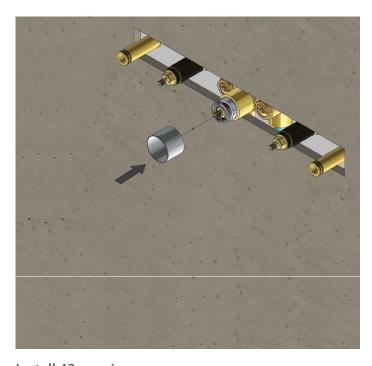


Install 42mm ring

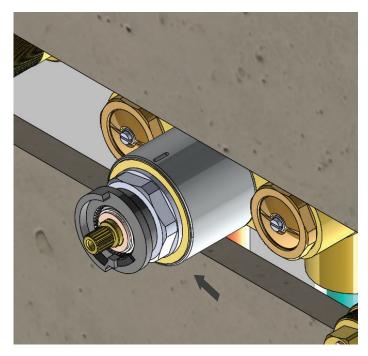


The 42mm ring must be flush. Otherwise the handle will not fit properly



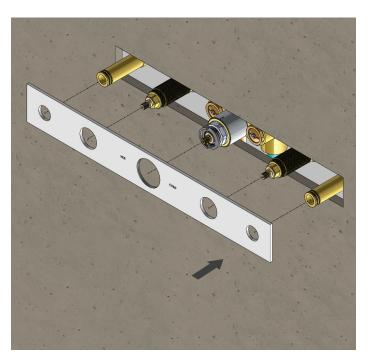


Insert trim plate

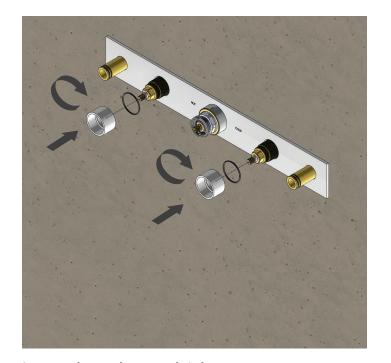

Insert adapter base and tighten




Align Trim plate till it is straight

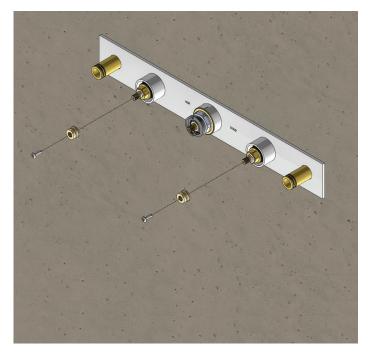


Insert centering knob & screws



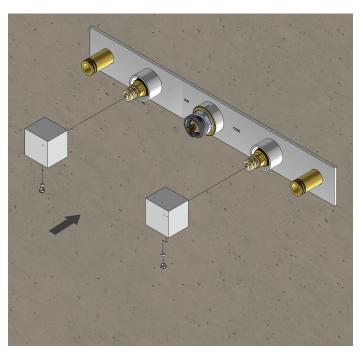

Insert volume handle. Tighten hex screw & insert cover button

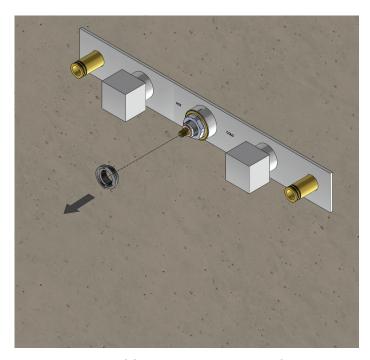

Remove anti-scald temperature ring and reinsert in correct position - see next image




Caliberate cartridge before inserting temperature handle. Red marks must align.




Correctly re-insert anti-scald temperature ring in the right position




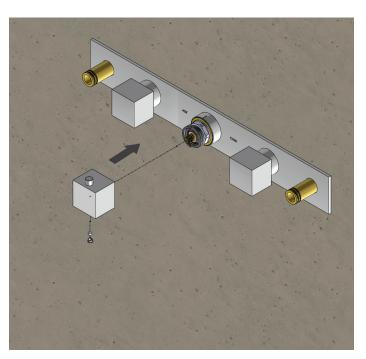


Insert temperature handle. Tighten hex screw & insert cover button

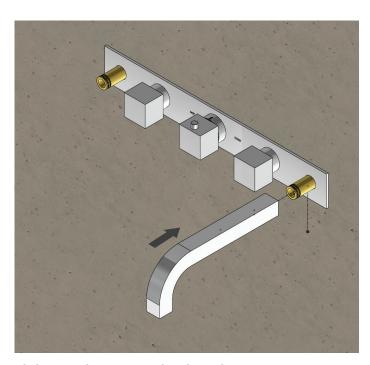

Slide on tub spout and tighten hex screw

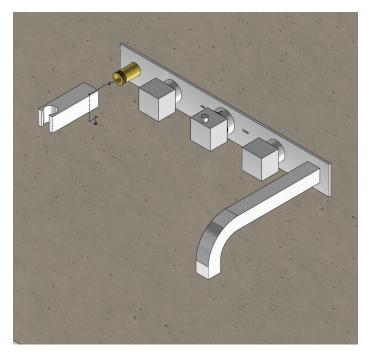


Slide on hand held holder and tighten hex screw

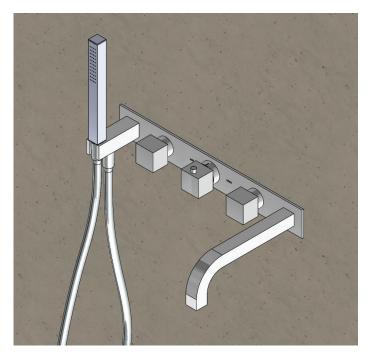

Attach hose and hand shower. This photo shows a completely installed trim




### REPLACING THE THERMOSTATIC CARTRIDGE

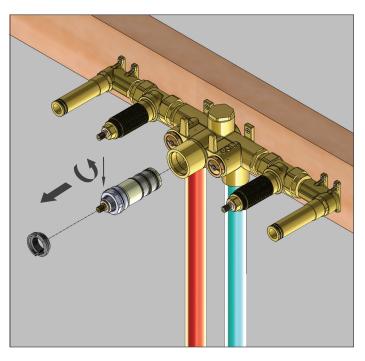

- 1. Remove Anti-Scald Ring
- 2. The temperature cartridge can be removed easily in one operation by using a spanner.


- 1. Remove Threaded Rod using a spanner
- 2. Remove diverter flange
- 3. Remove cartridge by turning with a spanner and pulling out with a pair of pliers.

#### REPLACING THE VOLUME CARTRIDGE

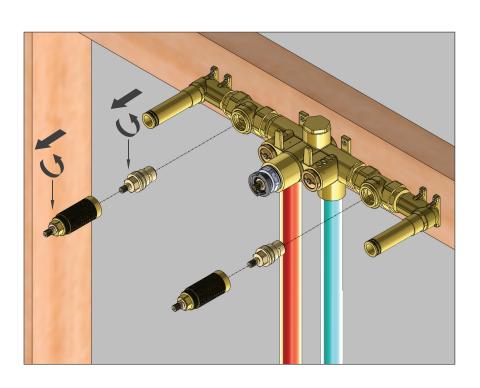




## **REPLACING THE SUPPLY STOPS**

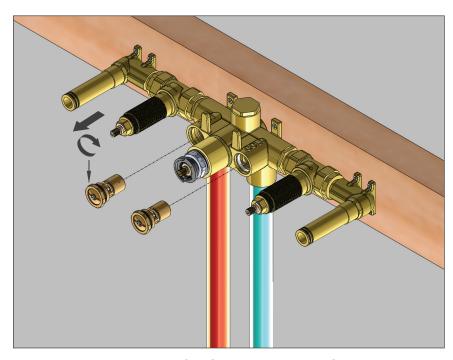


Use a spanner to twist in the shown position and remove supply stop




## **INSTALLING EXTENSIONS TO THE VALVE - OPTIONAL**

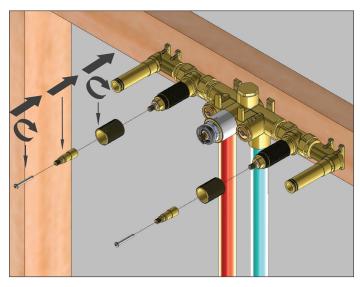


Install volume extension kit - 3 Pieces as shown above

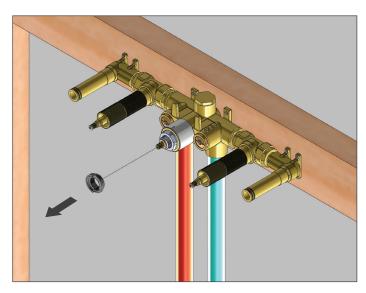

Remove anti scald temperature ring

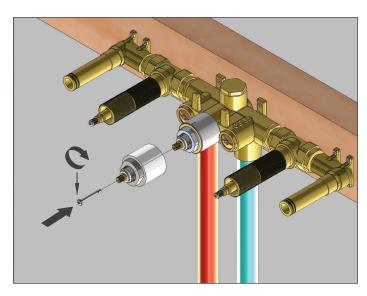


Install thermostatic handle extension and reinsert anti scald temperature ring

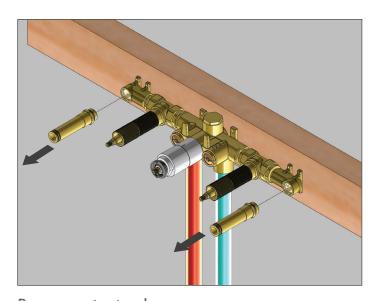


Remove output rods



# INSTALLING EXTENSIONS TO THE VALVE - OPTIONAL

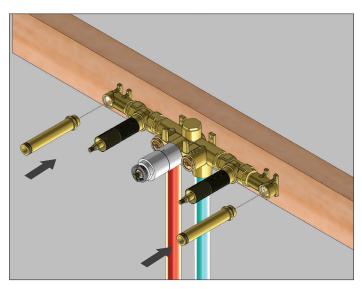

Install longer output rods

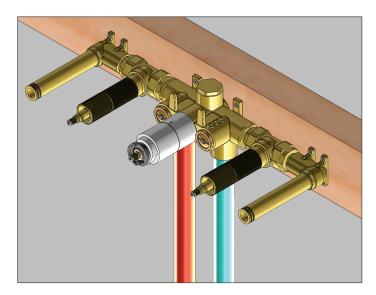


**Complete Extension Assembly** 



## **CARTRIDGE CLEANING & MAINTENANCE**

### **Thermostatic Cartridge:**

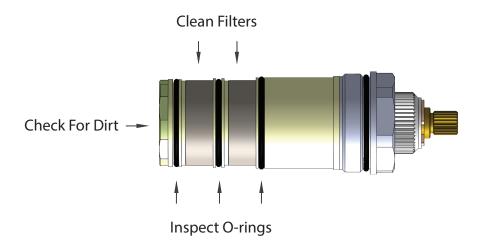

### **Volume Control Cartridge:**

