




# 240.1950 Wall Mount Lavatory Faucet



### **NOTICE TO HOMEOWNER**

- We recommend that this product is installed by a qualified professional plumber.
- Please check this product immediately to ensure that it has
  not been damaged and is complete. Before installation, please
  make sure this product is the correct model and you have all
  the parts required for installation and use.
- Please flush the water system to ensure that no metal swarf, solder, and other impurities can enter the product.
- Turn off water supply before commencing work.
- Please read these instructions carefully and retain for future reference.

#### **BEFORE YOU BEGIN**

- You must observe all local plumbing laws and codes.
- Do not install this valve if it does not meet local plumbing codes.
- Shut off the main water supply.





# 240.1950 Wall Mount Lavatory Faucet

| TARI | FOF | CON | TENTS |
|------|-----|-----|-------|

| • Operating Specifications        | •    |  | • |  | • | 1 |
|-----------------------------------|------|--|---|--|---|---|
| Valve Installation And Tolera     | ince |  |   |  |   | 2 |
| • Connecting Supply Lines .       |      |  |   |  |   | 3 |
| • Installing The Product .        |      |  |   |  |   | 4 |
| • Installing Extension (Optional) |      |  |   |  |   | 6 |
|                                   |      |  |   |  |   |   |
|                                   |      |  |   |  |   |   |

www.isenbergfaucets.com





### **OPERATING SPECIFICATIONS**

## WATER TEMPERATURE



This product is to be used with water at a temperature range of 40°F - 120°F ONLY!

## **WATER PRESSURE**



This product is to be used with a water pressure range of 15 PSI to 80 PSI ONLY

If water pressure is greater than 80 PSI install a pressure reducing valve (PRV)


This valve meets or exceeds ANSI A112.18.1 and ASSE 1016

#### **VALVE INSTALLATION AND TOLERANCE**

#### **CUT-OUT DIMENSIONS**


Isenberg's wall mount two handle lavatory valves does not come with a mud guard.

It is essential to review the cut-out dimensions shown on the left in dotted circular lines so that the proper hole sizes are cut-out in the finished tile.




3x Ø 1.3" [33mm]

#### **VALVE INSTALLATION INTO THE WALL**

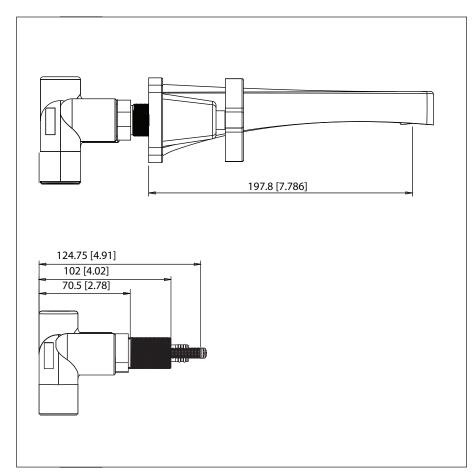

Install a crossbeam at the location where the valve will be installed. The distance between back of the valve to the finished tile surface should be between xxx" and YYY".

Level and mount the valve to the crossbeam. Ensure valve is straight and do not install at an angle or upside down.







#### CONNECTING SUPPLY LINES

Connect valve to the hot and cold supplies using 1/2"-NPT copper supply lines. Do not apply heat directly to the valve as this may damage rubber and plastic seals and will void the warranty.

#### **TESTING THE VALVE**

Prior to completing the finished wall, fully test valve function to ensure that valve is working properly (see FLUSHING & PRESSURE TESTING section below).

Ensure that no leaks are present. Check cartridge function. To test valve function turn on the water to make sure both hot and cold supplies are working.

#### **FLUSHING & PRESSURE TESTING**


1. BEFORE INSTALLATION OF DRY WALL AND CLOSING OF WALL OPENINGS


The system must be flushed and pressure tested. Metal chips and sand commonly found in plumbing pipes can damage the components of the valve.


2. Ensure that both hot and cold supply lines are turned off. Ensure that the cartridge stem is in the off position. Remove the cartridge and slowly turn on the hot and cold supply lines. This will flush out the valve body and pipes.




### **INSTALLING THE PRODUCT**

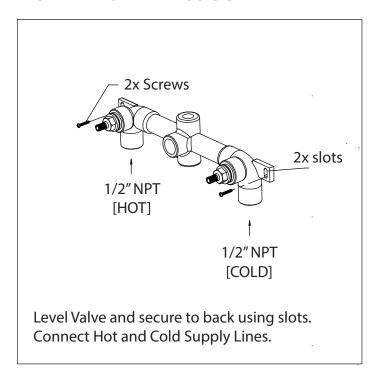

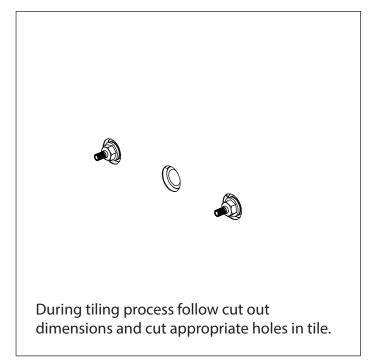


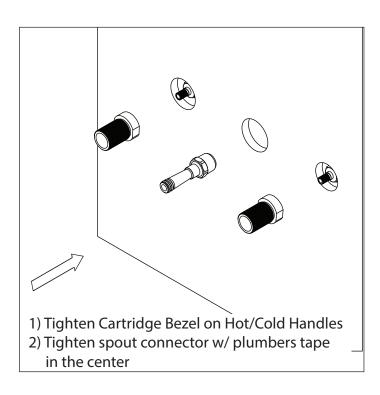

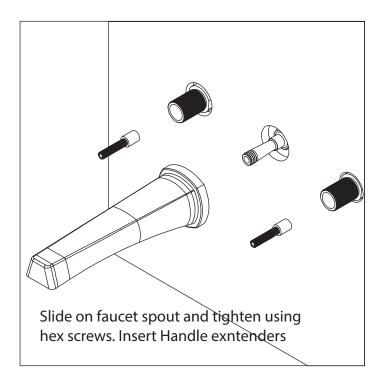




## **INSTALLING THE PRODUCT**

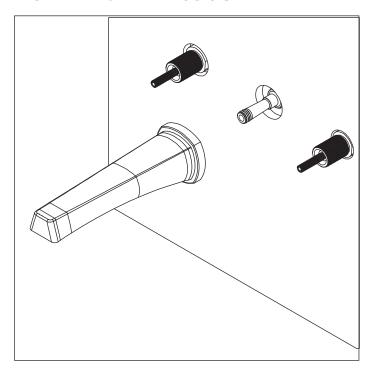



The Handle extender may need to be cut to size utill the handle can touch the finished tile.


If the handle does not touch the finidhed tile do not over tighten!

Cut entender instead.





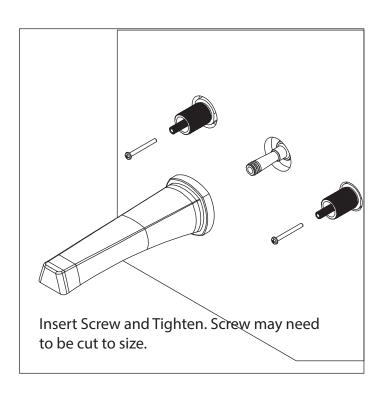

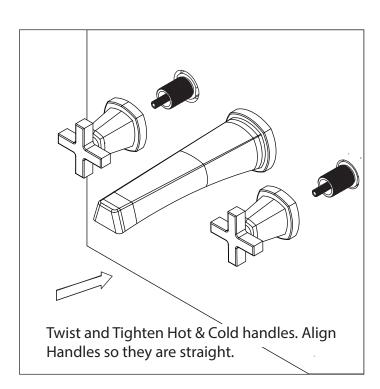





# **INSTALLING THE PRODUCT**

