


CIR.2740 | Thermostatic Mixer with 2 Output Valve - 3/4"





Trim [CIR.4000VT**] + Valve [JVH.2717F]

SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate 22 LPM @ 3 BAR
- Extension Available JVH.4101E**
- 2 Output

Technical Diagram

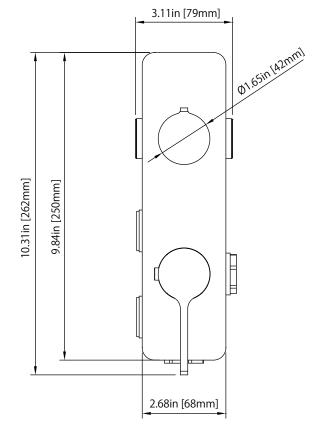


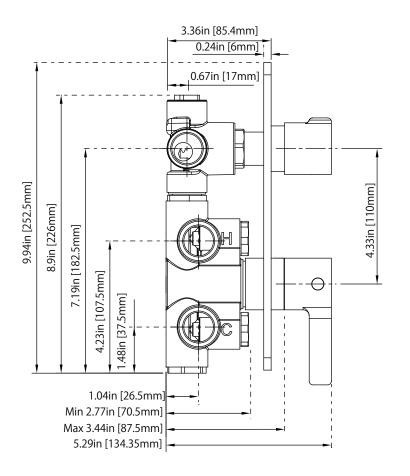



Universal Fixtures™

JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2





SPECIFICATIONS:


- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Horzontal or Vertical install compatible.
- Thermostatic Valve Flow Rate 22 LPM @ 3 BAR
- Extension Available JVH.4101E**

A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

Technical Diagram

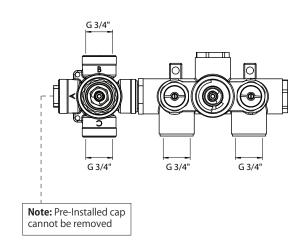

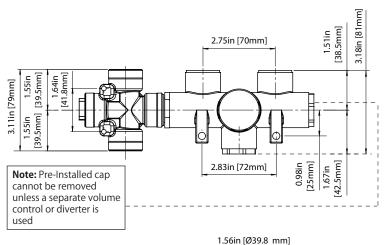

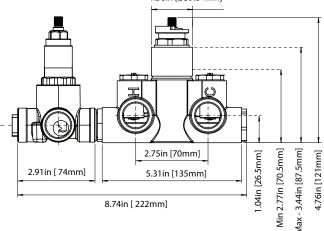

Universal Fixtures™


JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2

TWO OUPTUT - NO SHARED PORT OPERATION

Diverter Cartridge # - 15109 (Included)

Total 3 Positions as defined below, with only 1 port active at one time.

- Position 0 Off No Water Flow
- Position 1 Output B Activated
- Position 2 Output C Activated

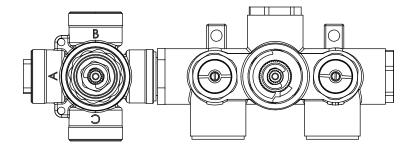

TWO OUPTUT - SHARED PORT OPERATION

Diverter Cartridge # - 15103 (Not Included)

Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 Off No Water Flow
- Position 1 Output B Activated
- Position 2 Output B+C Activated
- Position 3 Output C Activated