


CIR.7250 | Two Output Set W/ Rain Shower & Hand Shower

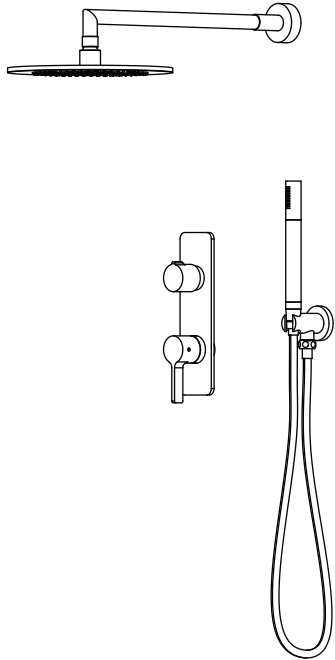

COMPONENTS

- HH1040 - 16" Shower Arm
- RHB.10R - 10" Shower Head
- CIR.4000VT - Shower Trim
- JVH.2717F - 3/4" Shower Valve
- HH1004H - Hand Shower
- HH8008 - Wall Elbow w/ Holder
- HH.150EM - 1.5m Hose

SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

SHOWER HEAD:


- Solid brass construction
- 11 LPM flow rate

See individual component specification sheets on following pages for further details.


HH1040 | Round Shower Arm - 400mm - 16"

SPECIFICATIONS:


- Solid Brass Shower Arm
- With Sliding Flange

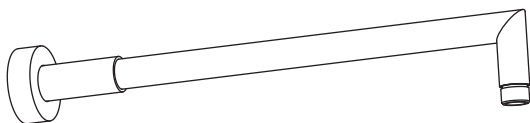

Technical Diagram

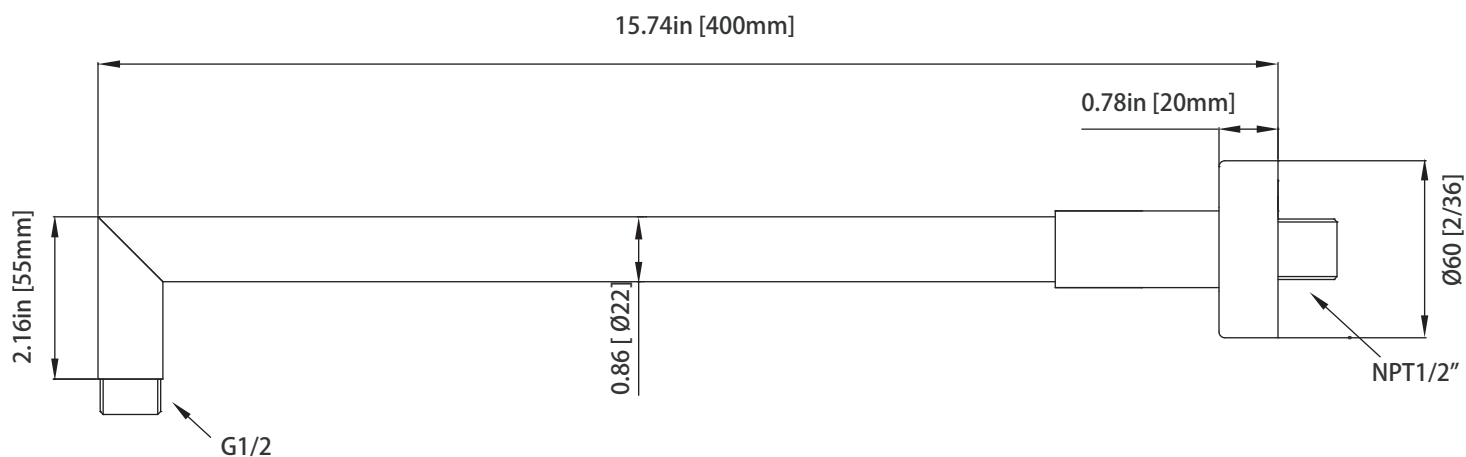


RHB.10R | 10" Round Brass Shower Head

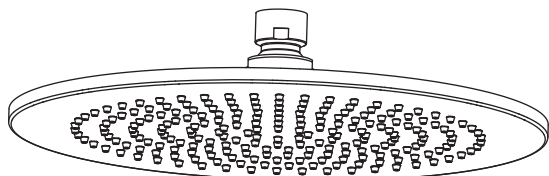


SPECIFICATIONS:

- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 121 Nozzles

Technical Diagram

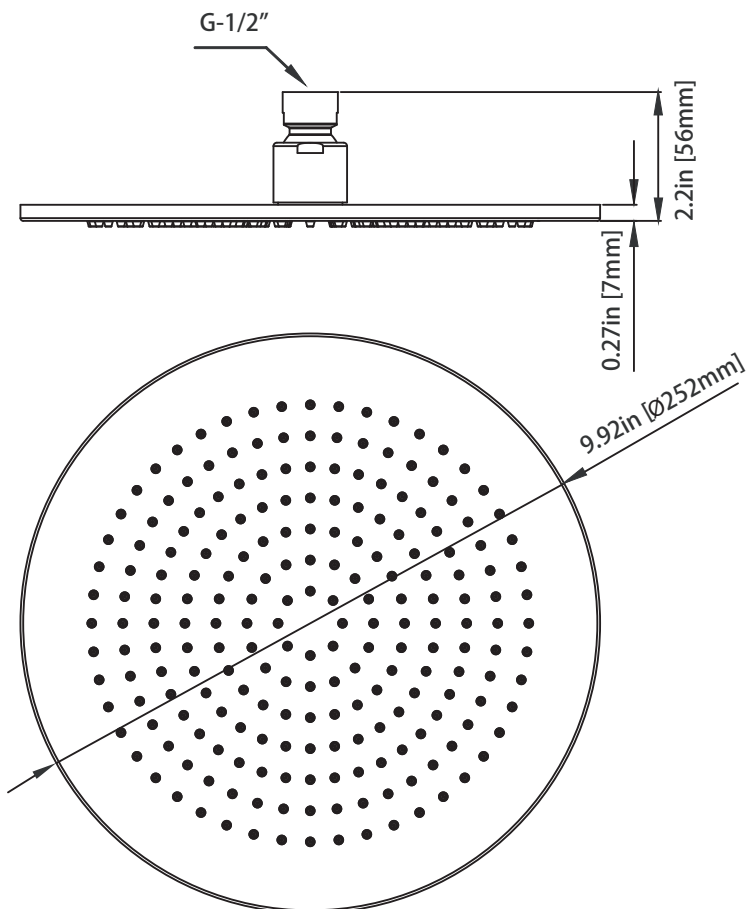


CIR.4000VT | Thermostatic Shower Trim

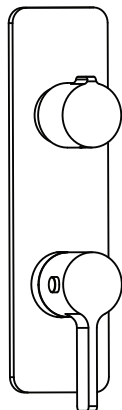


SPECIFICATIONS:

- Solid Brass construction
- Valve not included - Trim only
- Bottom knob controls temperature
- Top knob controls volume and diversion
- Use in tub filler or shower applications

Technical Diagram

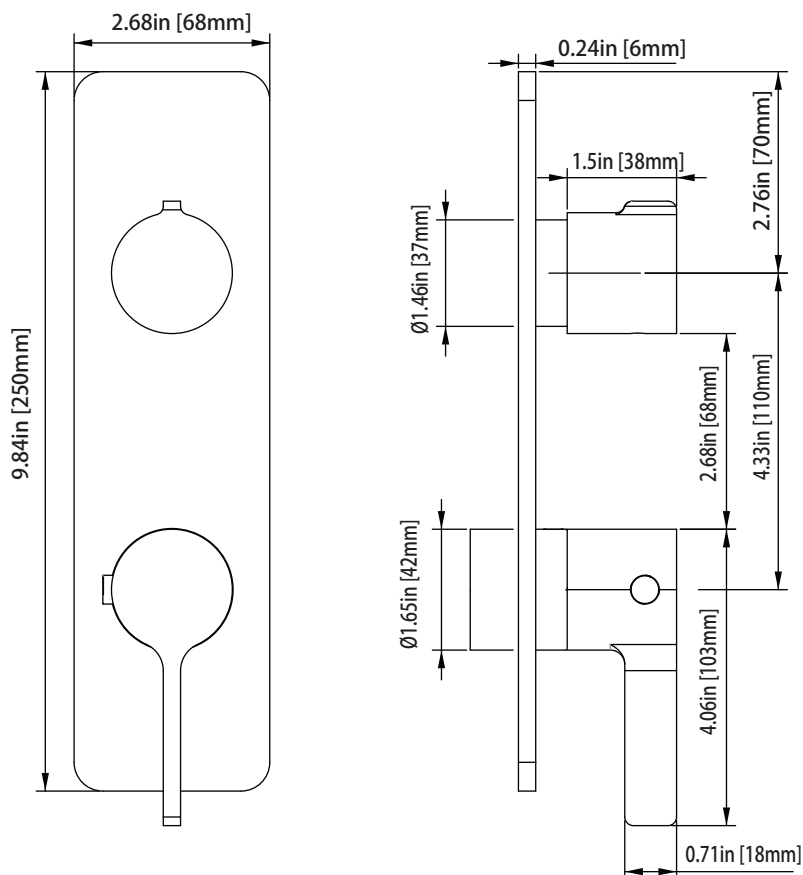

JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output

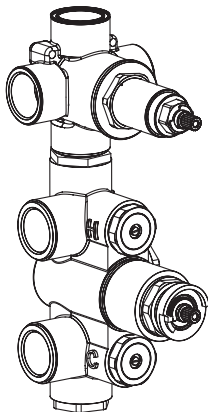


SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E**

! A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

Technical Diagram

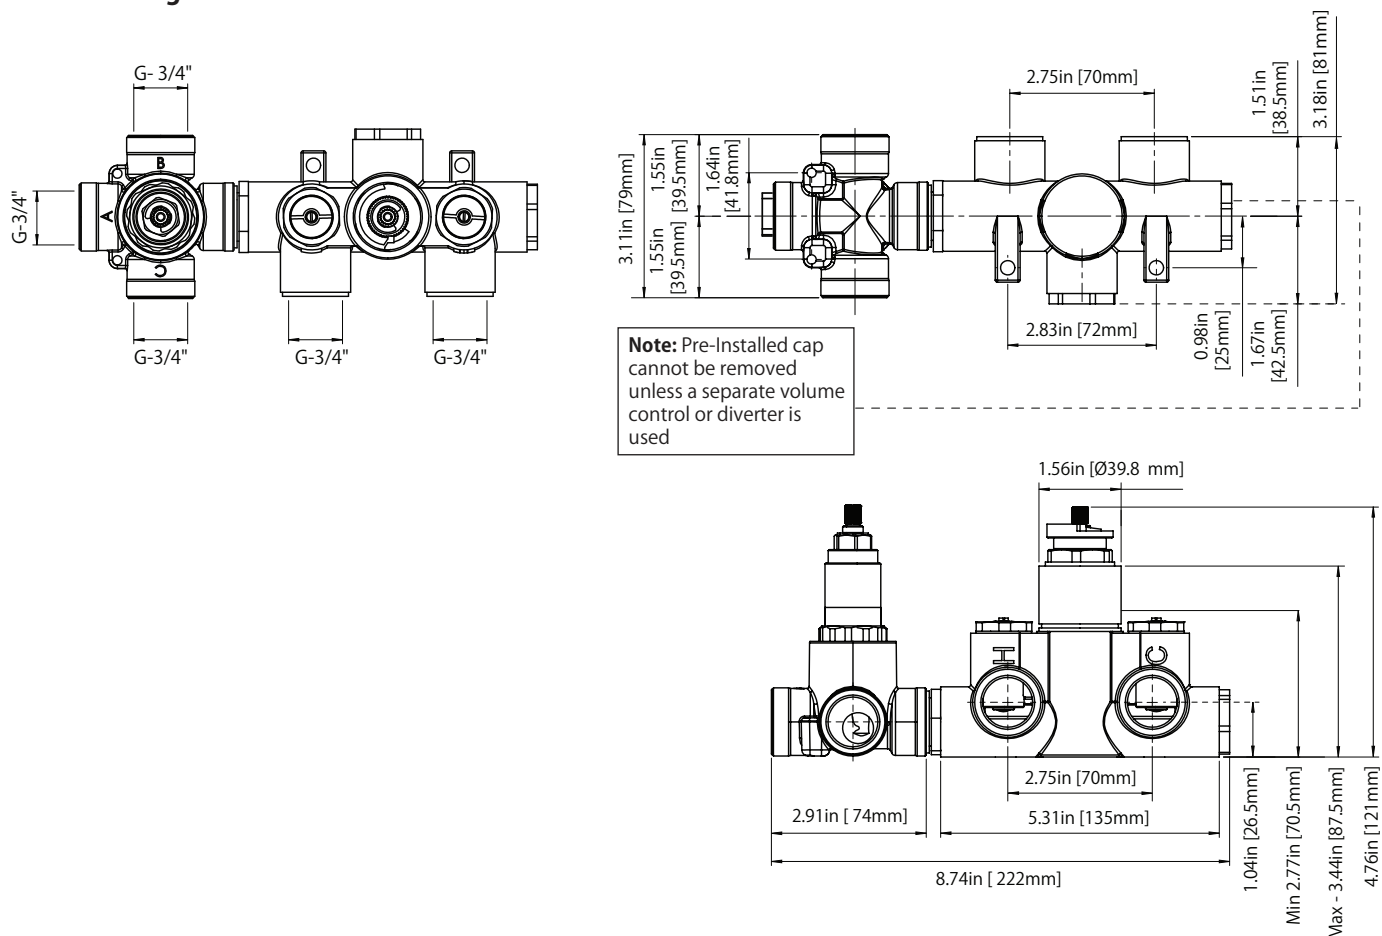


HH1004H | Solid Round Brass Hand Shower

SPECIFICATIONS:

- Solid Brass Construction
- 6 LPM Flow Rate @ 3 BAR
- With back flow prevention check valve




Technical Diagram

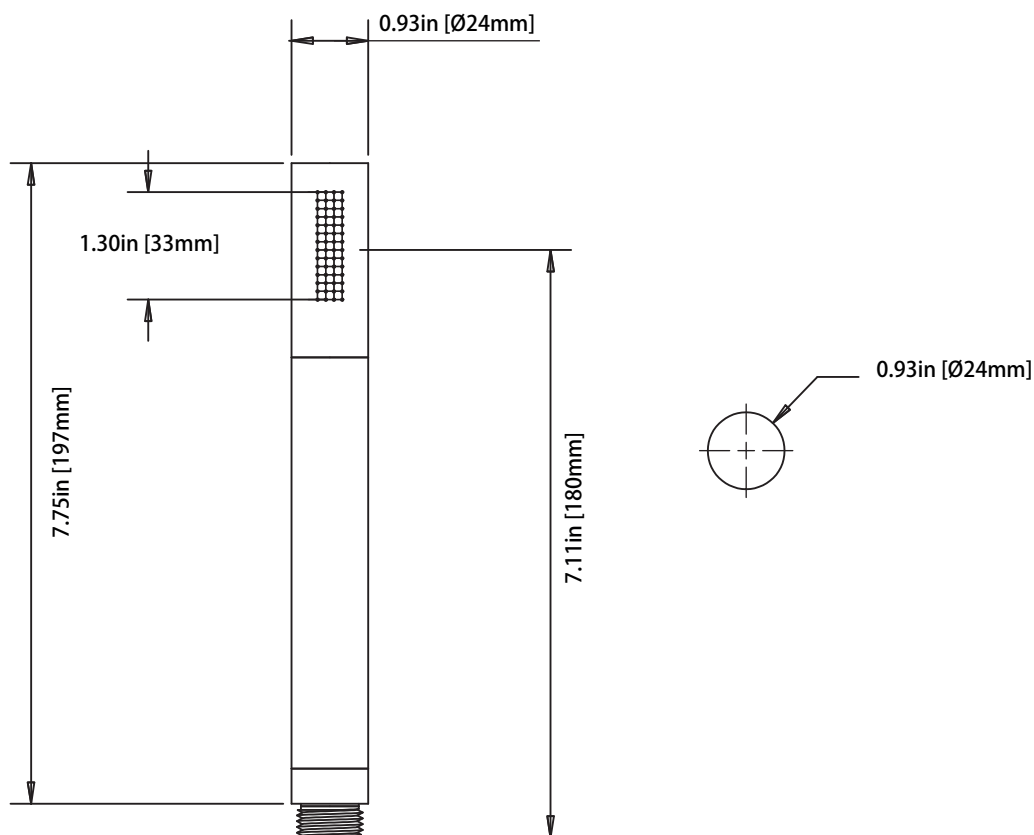


HH8008 | Wall Elbow With Holder Combo

SPECIFICATIONS:

- Solid Brass construction
- Includes check valve with back flow prevention.

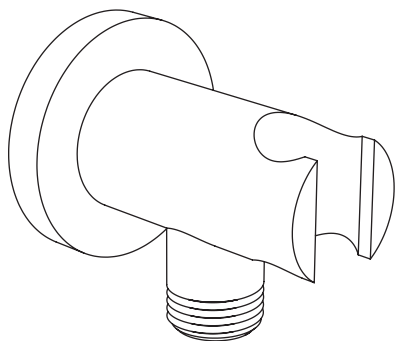

Technical Diagram

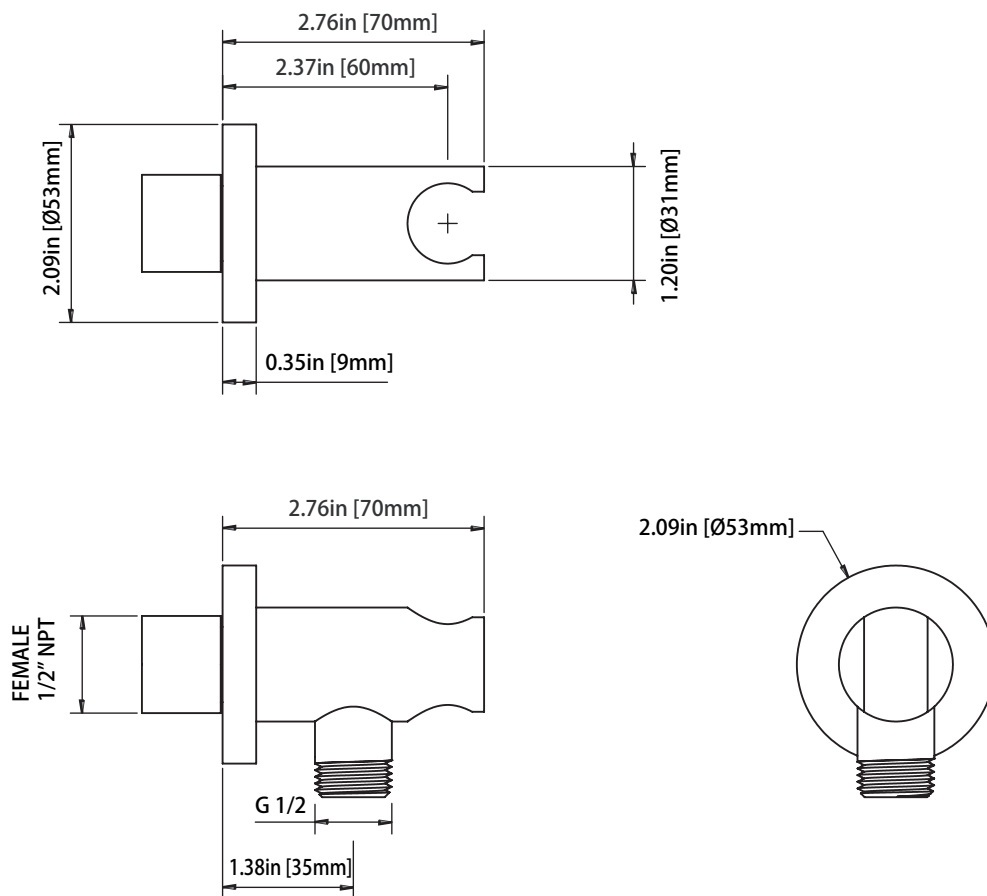

HH.150EM | Easy Maneuver Hose



SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

Technical Diagram

