


## CIR.7350 | Two Output Shower W/ Rain Head & Hand Held

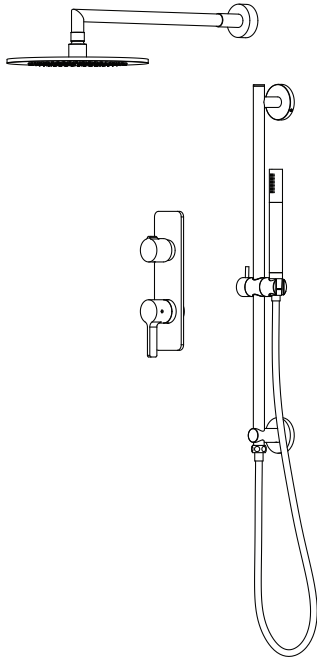

### COMPONENTS

- HH1040 - 16" Shower Arm
- RHB.10R - 10" Shower Head
- CIR.4000VT - Shower Trim
- JVH.2717F - 3/4" Shower Valve
- HH1004H - Hand Held
- HH.150EM - 1.5m Hose
- ORO.601023A - Slide Bar

### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

### SHOWER HEAD:


- Solid brass construction
- 11 LPM flow rate

See individual component specification sheets on following pages for further details.


## HH1040 | Round Shower Arm - 400mm - 16"

### SPECIFICATIONS:


- Solid Brass Shower Arm
- With Sliding Flange

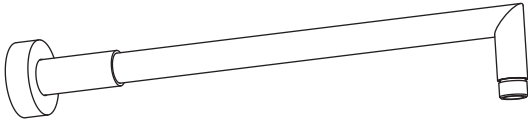

### Technical Diagram

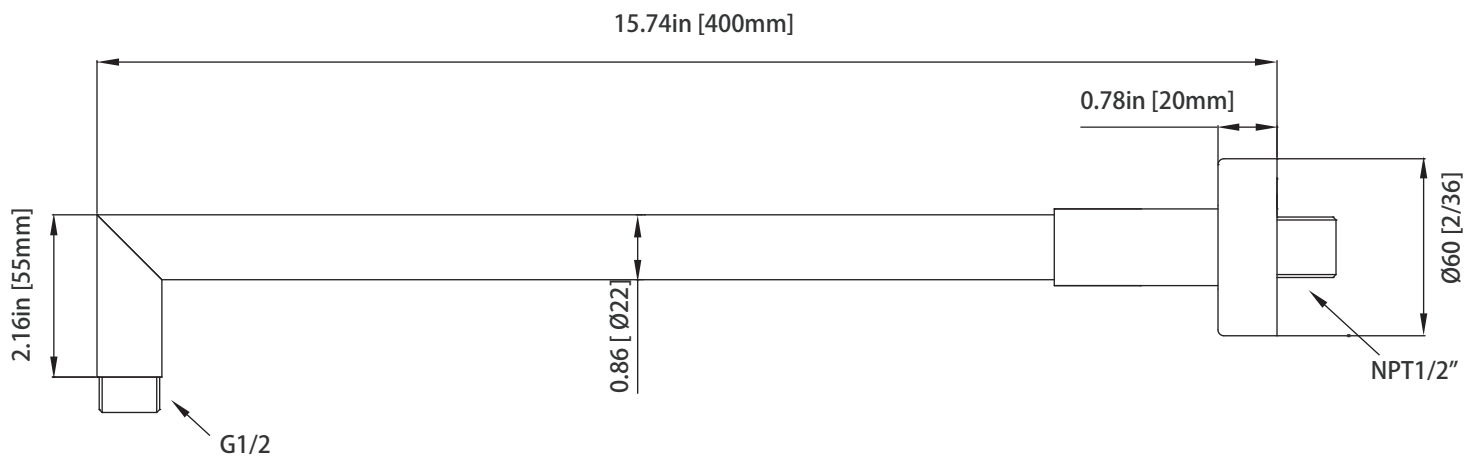


## RHB.10R | 10" Round Brass Shower Head

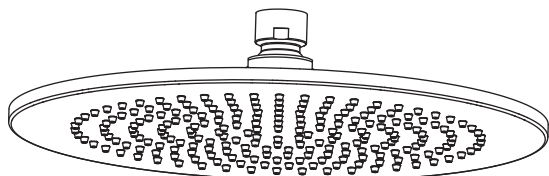


### SPECIFICATIONS:

- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 121 Nozzles

### Technical Diagram

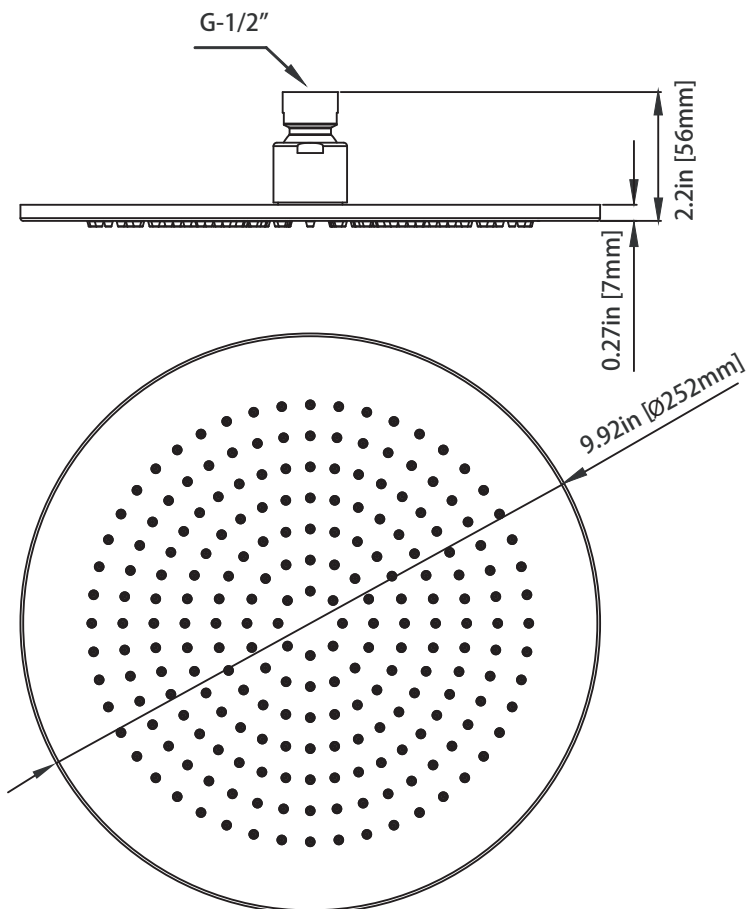


## CIR.4000VT | Thermostatic Shower Trim

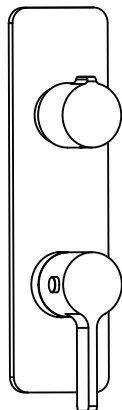


### SPECIFICATIONS:

- Solid Brass construction
- Valve not included - Trim only
- Bottom knob controls temperature
- Top knob controls volume and diversion
- Use in tub filler or shower applications

### Technical Diagram

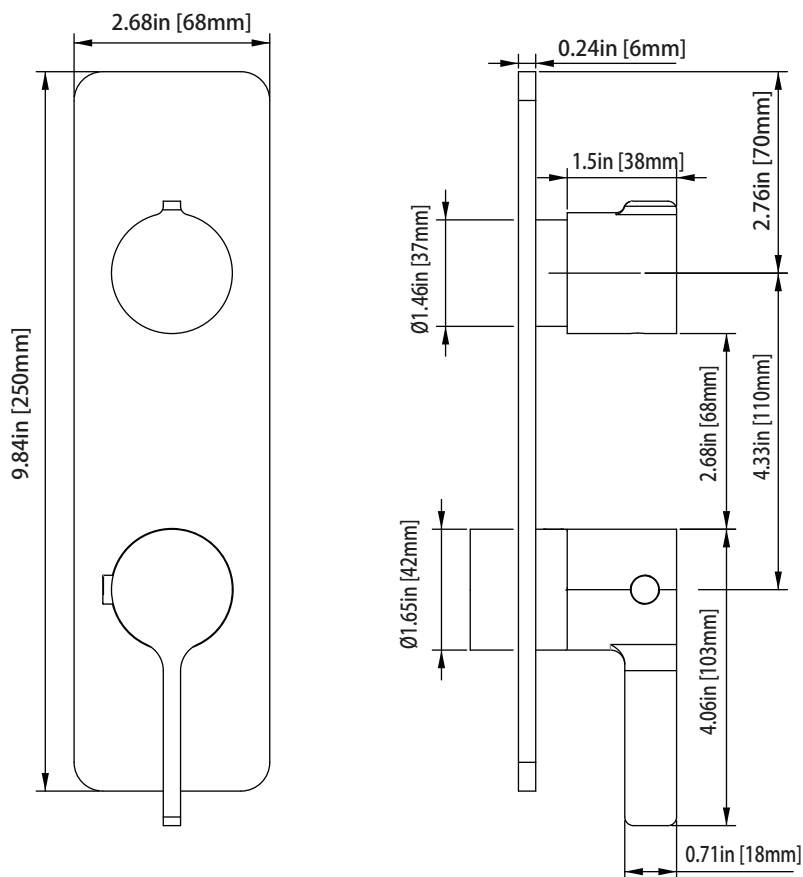


## JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output

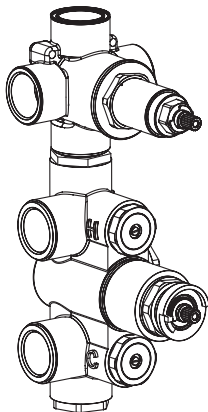


**SPECIFICATIONS:**

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E\*\*



### Technical Diagram

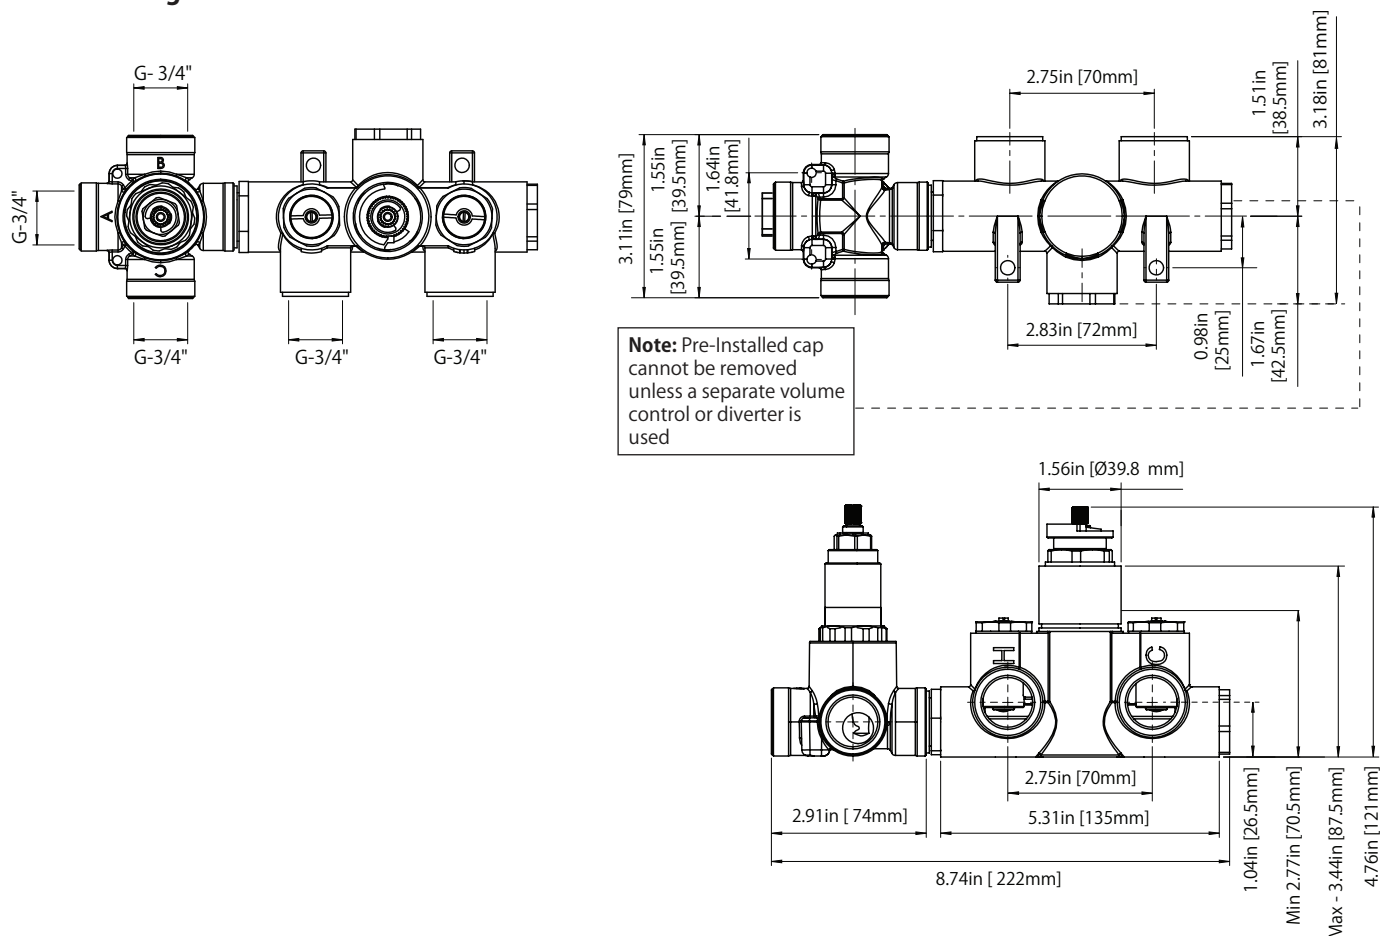


## HH1004H | Solid Round Brass Hand Shower

### SPECIFICATIONS:

- Solid Brass Construction
- 6 LPM Flow Rate @ 3 BAR
- With back flow prevention check valve




### Technical Diagram

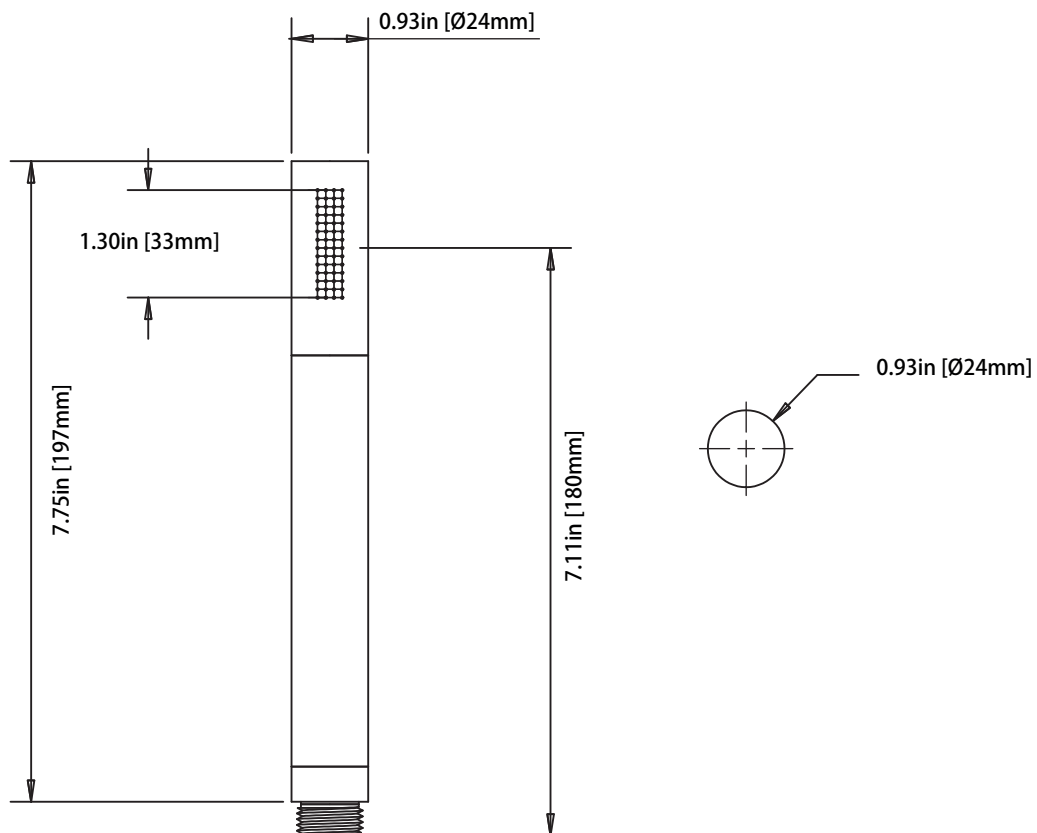


## ORO.601023A | Slide Bar With Integrated Wall Elbow

### SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation
- Integrated wall elbow
- 1/2" male connection with adjustable slide on installation
- Includes check valve with back-flow prevention



### Technical Diagram

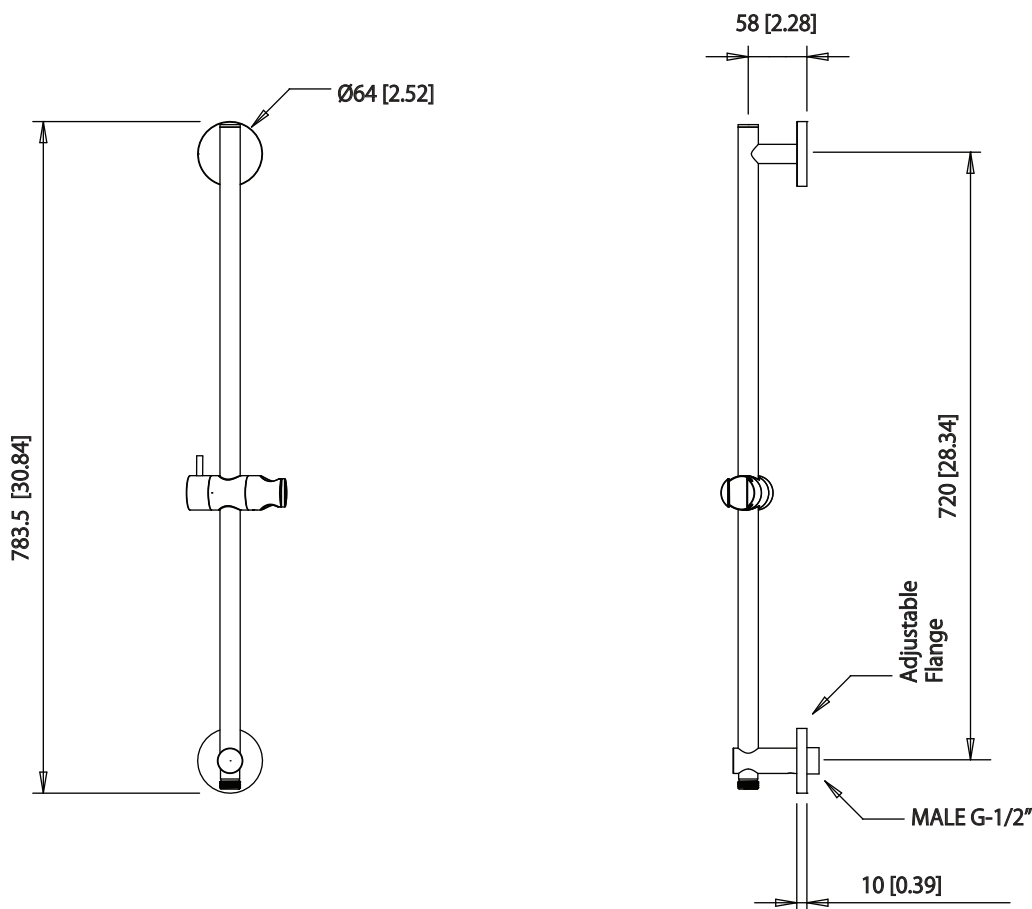

## HH.150EM | Easy Maneuver Hose



### SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

### Technical Diagram

