


ECH.4801 | Thermostatic Bath / Shower Mixer with 4 Output Valve - 3/4"



Trim [ECH.4500T**]


Valve [JVH.4801]


SPECIFICATIONS:

- Turn middle knob to control temperature.
- Turn top knob to divert water flow between outlets 1 & 2.
- Turn top knob to divert water flow between outlets 3 & 4.
- Thermostatic Valve Flow Rate 22 LPM @ 3 BAR
- Extension Available JVH.4401E**

A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

Technical Diagram

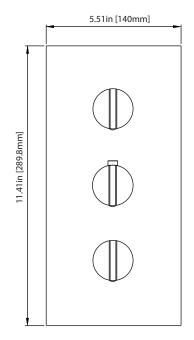


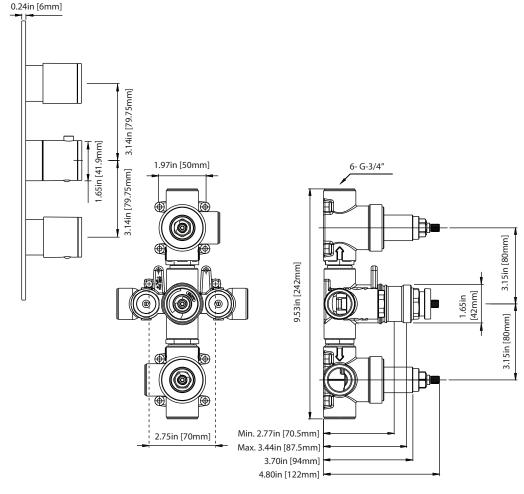



Universal Fixtures ™

JVH.4801 | 3/4" Thermostatic Valve - 4 Output





SPECIFICATIONS:

- Turn middle knob to control temperature.
- Turn top knob to divert water flow between outlets 1 & 2.
- Turn top knob to divert water flow between outlets 3 & 4.
- Thermostatic Valve Flow Rate 22 LPM @ 3 BAR
- Extension Available JVH.4401E**



Technical Diagram

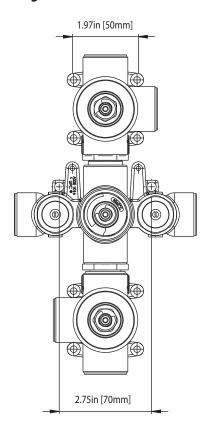

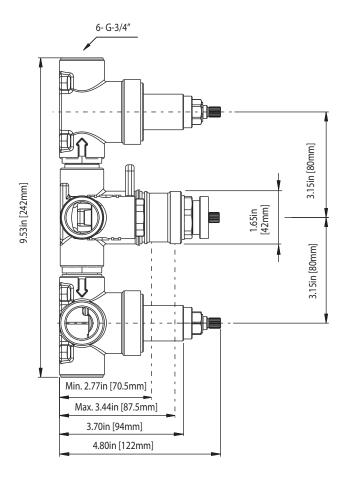



JVH.4801 | 3/4" Thermostatic Valve - 4 Output

OUTPUT OPERATION

TOP HANDLE

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 Off No Water Flow
- Position 1 Output 1 Activated
- Position 2 Output 2 Activated

BOTTOM HANDLE

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 Off No Water Flow
- Position 1 Output 3 Activated
- Position 2 Output 4 Activated

PORT OPERATION

Ports that can be operated simultaneously:

- Output 1 & 3 can be operated simultaneously
- Output 1 & 4 can be operated simultaneously
- Output 2 & 3 can be operated simultaneously
- Output 2 & 4 can be operated simultaneously

Ports that cannot be operated simultaneously:

- Output 1 & 2 cannot be operated simultaneously
- Output 3 & 4 cannot be operated simultaneously

