


## ORO.7350 | Two Output Shower W/ Rain Head , Hand Held & Slide Bar

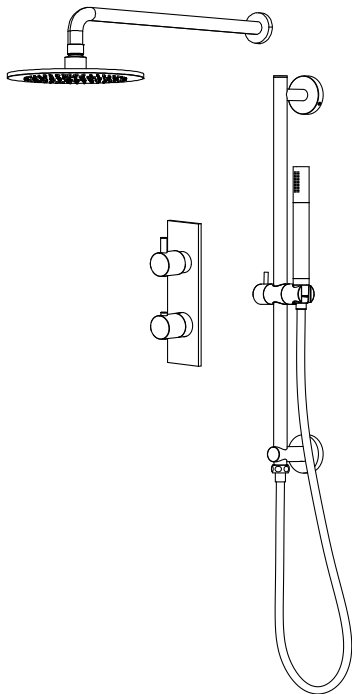

### COMPONENTS

- HH1012SA - 16" Shower Arm
- HH1002A - 8" Shower Head
- ORO.4000VT - Shower Trim
- JVH.2717F - Shower Valve
- HH1004H - Hand Shower
- HH.150EM - 1.5m Hose
- ORO.601023A - Slide Bar w/ Integrated Elbow

### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- Includes 15109 non-shared cartridge

### SHOWER HEAD:


- Solid brass construction
- 11 LPM flow rate

### HAND SHOWER:

- Solid Brass construction
- 6 LPM flow rate
- 1/2" male connection
- With back flow prevention check valve

See individual component specification sheets on following pages for further details.


HH1012SA | Round Shower Arm - 400mm - 16"

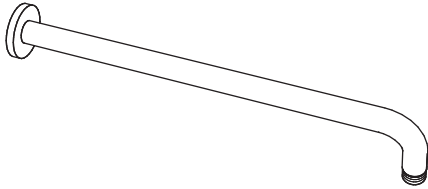

**SPECIFICATIONS:**

- Solid Brass Shower Arm
- With Sliding Flange


**Technical Diagram**

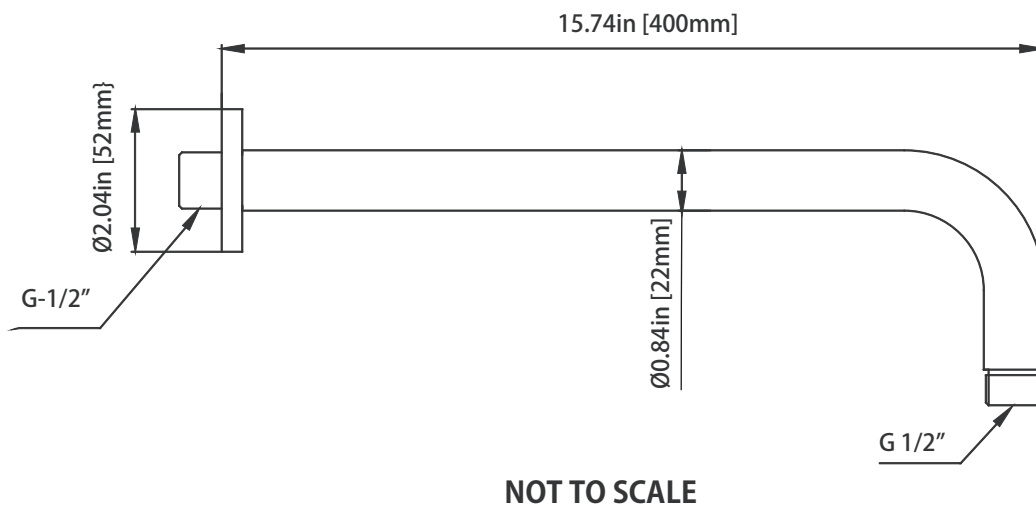


## HH1002A | 8" Brass Rain Shower

### SPECIFICATIONS:


- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 PM Flow Rate

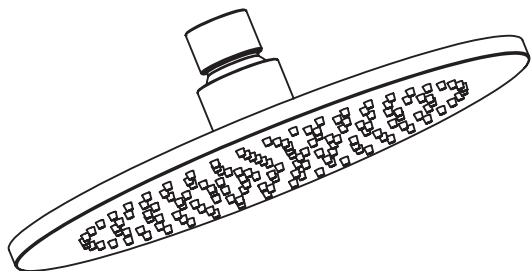

### Technical Diagram

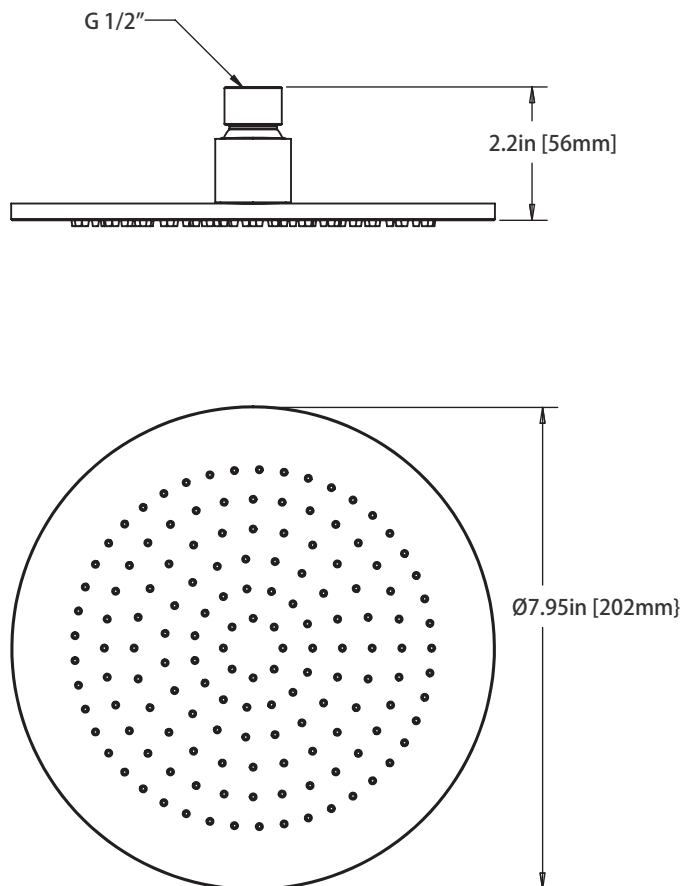


## ORO.4000VT | Thermostatic Shower Trim

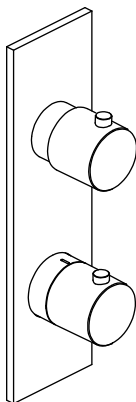


### SPECIFICATIONS:

- Solid Brass Construction
- Trim Only - Valve Not Included
- Turn bottom handle to control temperature
- Turn top handle to control volume

### Technical Diagram

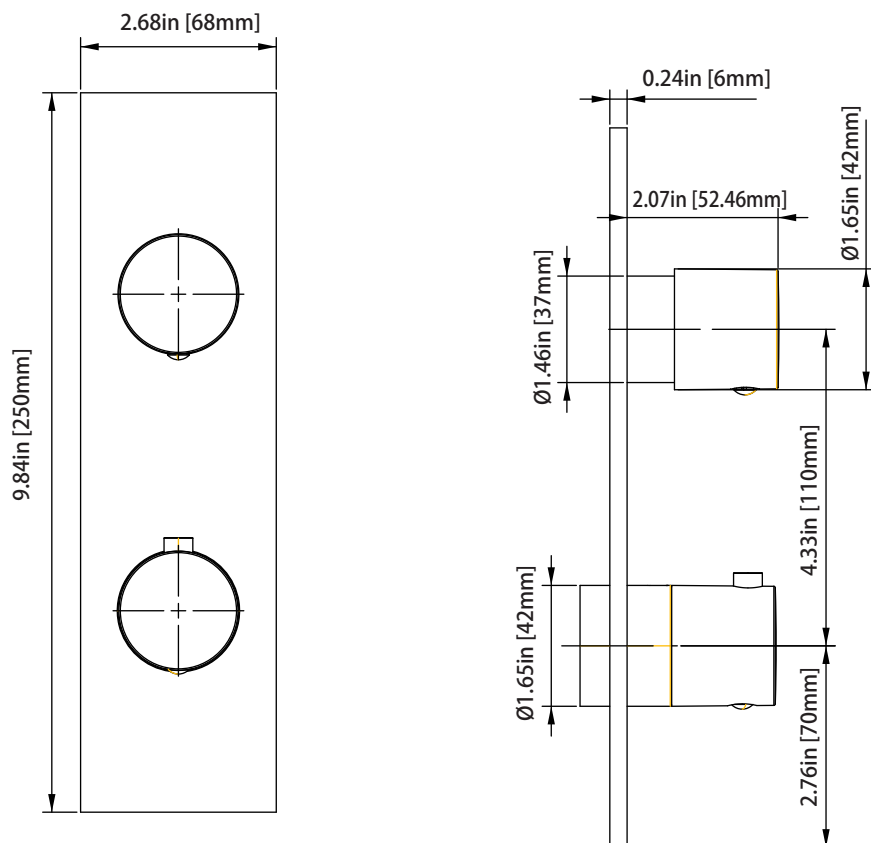

## JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2

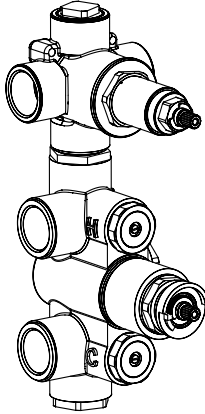


### SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E\*\*

**!** A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

### Technical Diagram

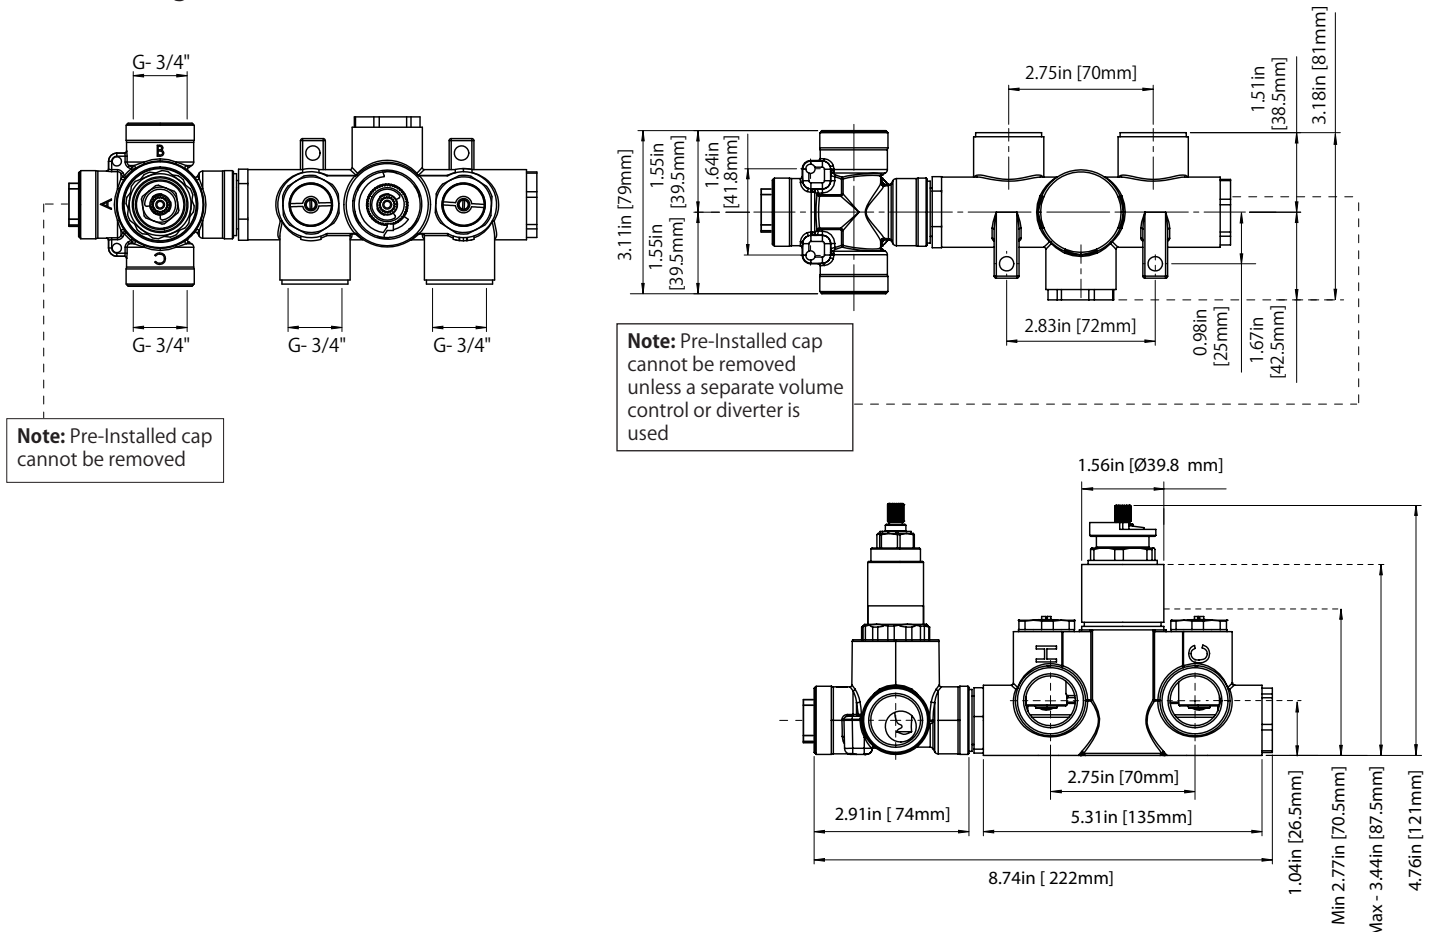

---

## JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2


### **TWO OUPUT - CAL-GREEN - NO SHARED PORT OPERATION**

---

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output C Activated

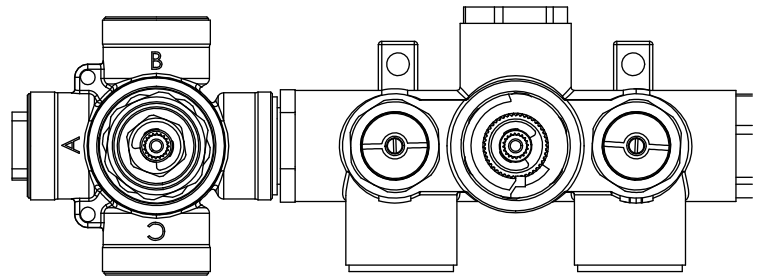

### **TWO OUPUT - SHARED PORT OPERATION**

---

Diverter Cartridge # - **15103** (Not Included)

Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output B+C Activated
- Position 3 - Output C Activated


## HH1004H | Solid Round Brass Hand Shower

### SPECIFICATIONS:

- Solid Brass Construction
- 6 LPM Flow Rate @ 3 BAR
- With back flow prevention check valve




### Technical Diagram

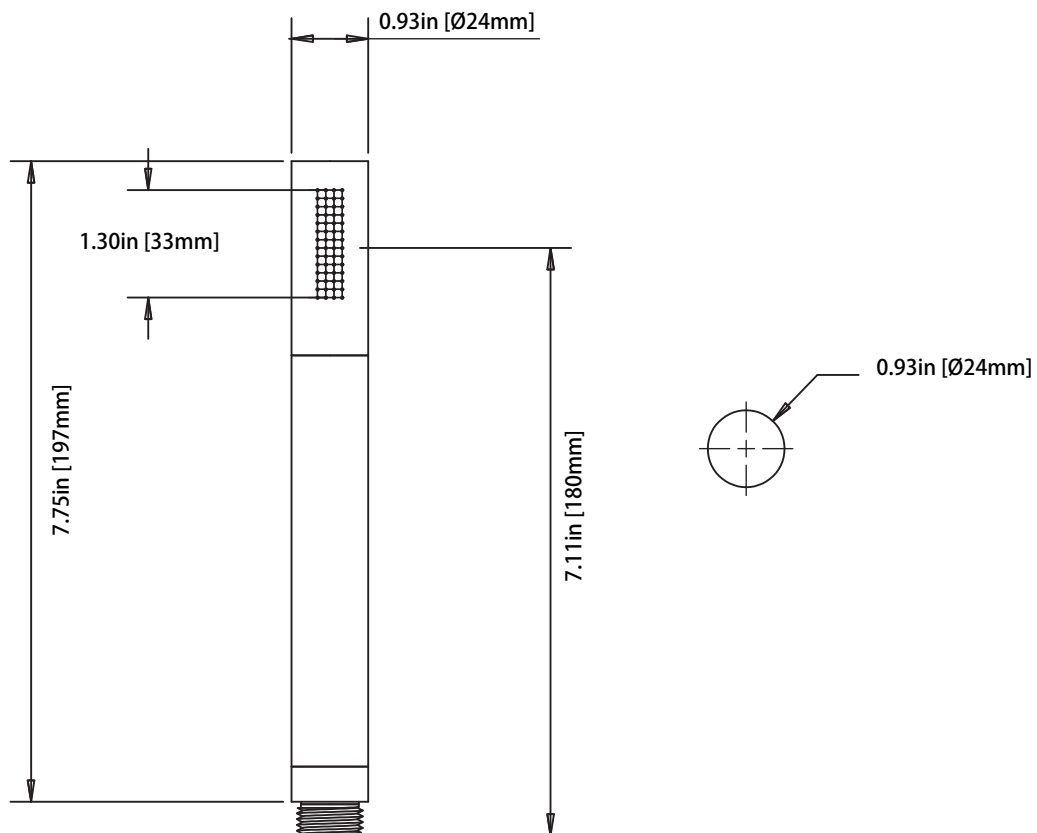


## ORO.601023A | Slide Bar With Integrated Wall Elbow

### SPECIFICATIONS:

- Solid Brass Construction
- Easy front of wall installation
- Integrated wall elbow
- 1/2" male connection with adjustable slide on installation
- Includes check valve with back-flow prevention



### Technical Diagram

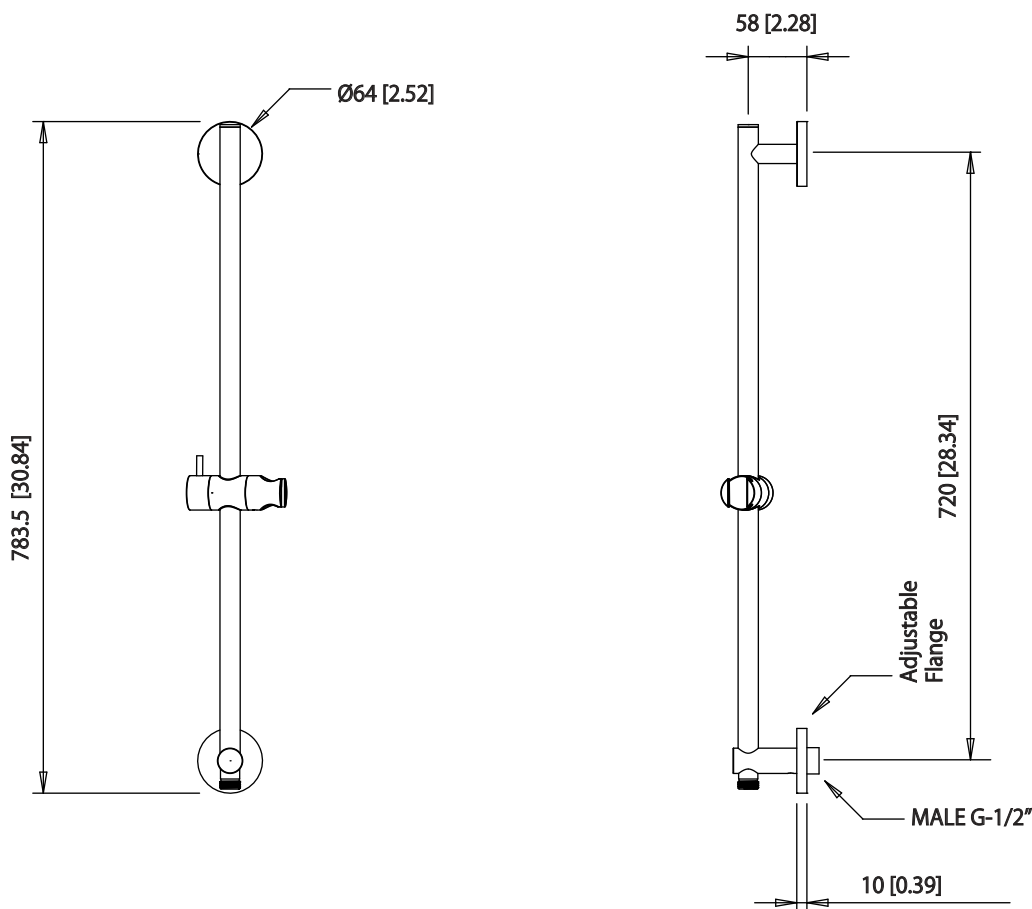



## HH.150EM | Easy Maneuver Hose



### SPECIFICATIONS:

- Stainless steel construction
- G-1/2" connection
- 1.5m length

### Technical Diagram

