



## VIR.4801 | Thermostatic Bath / Shower Mixer with 4 Output Valve - 3/4"



Trim  
[VIR.4500T\*\*]

+



Valve  
[JVH.4801]


### SPECIFICATIONS:

- Turn middle Handle to control temperature.
- Turn top Handle to divert water flow between outlets 1 & 2.
- Turn top Handle to divert water flow between outlets 3 & 4.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4401E\*\*



A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.


### Technical Diagram

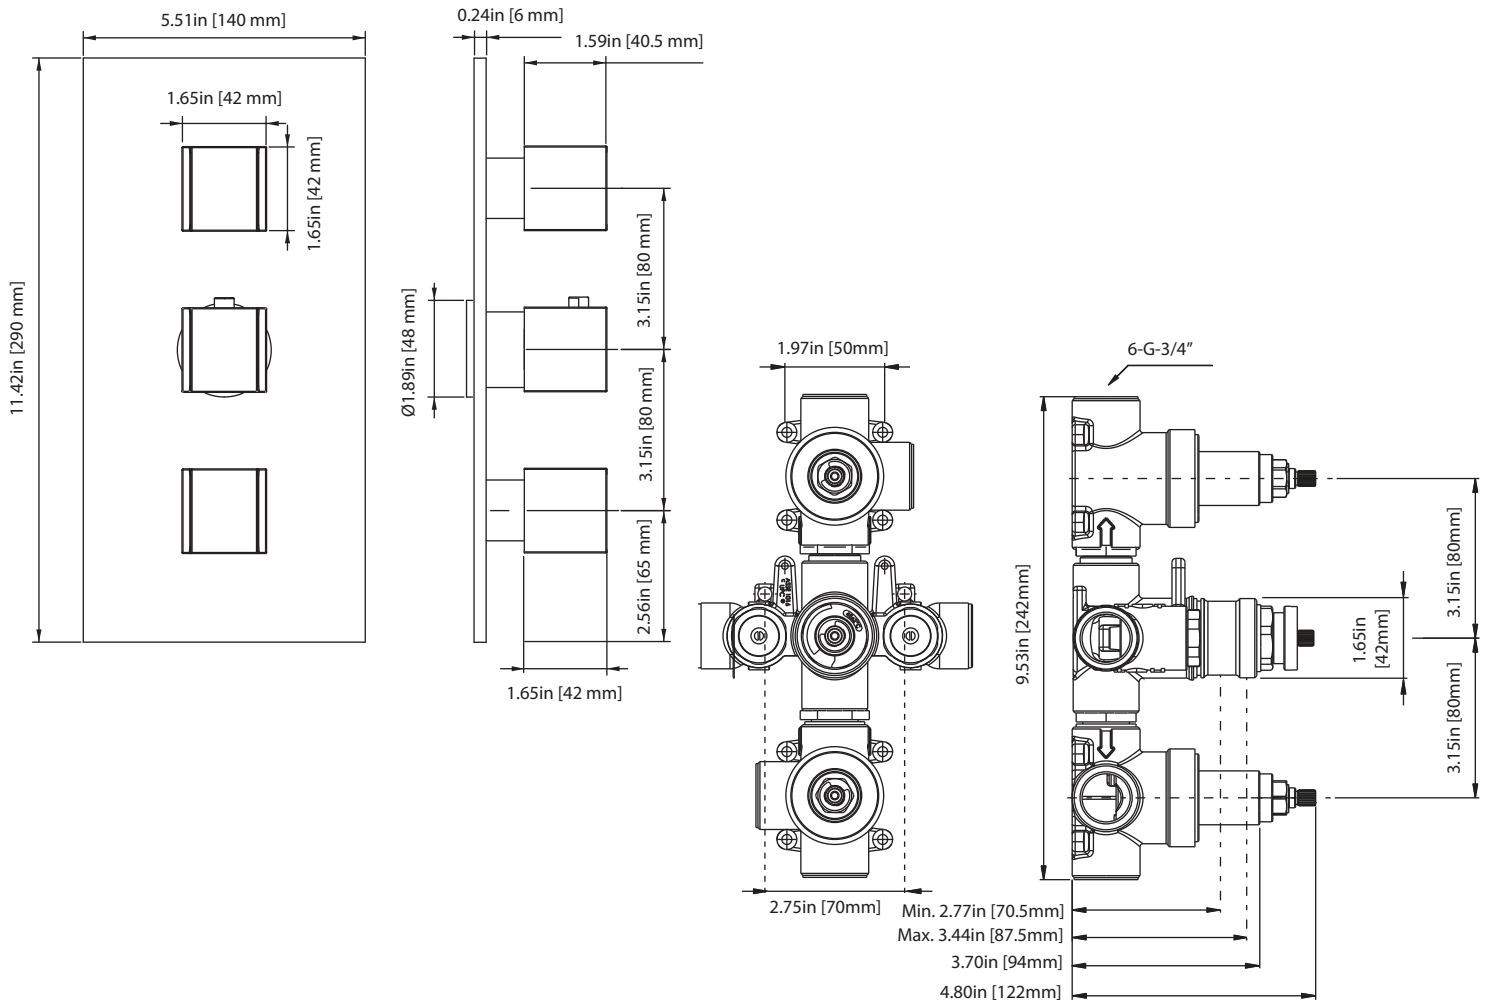

## JVH.4801 | 3/4" Thermostatic Valve - 4 Output


### SPECIFICATIONS:

- Turn middle knob to control temperature.
- Turn top knob to divert water flow between outlets 1 & 2.
- Turn top knob to divert water flow between outlets 3 & 4.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4401E\*\*

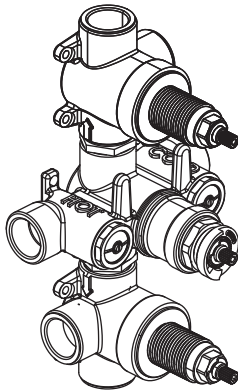

A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

### Technical Diagram

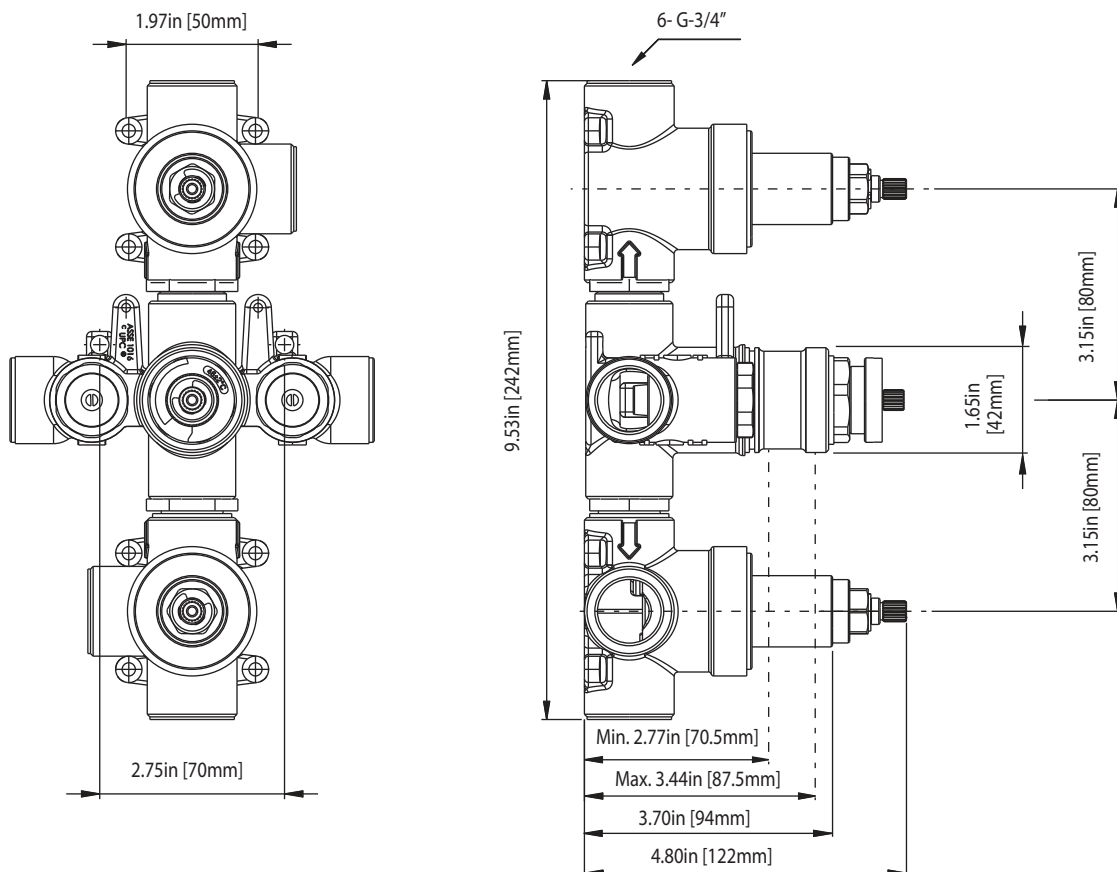

## JVH.4801 | 3/4" Thermostatic Valve - 4 Output

### OUTPUT OPERATION

#### TOP HANDLE

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output 1 Activated
- Position 2 - Output 2 Activated

#### BOTTOM HANDLE

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output 3 Activated
- Position 2 - Output 4 Activated

#### PORT OPERATION

Ports that can be operated simultaneously:

- Output 1 & 3 can be operated simultaneously
- Output 1 & 4 can be operated simultaneously
- Output 2 & 3 can be operated simultaneously
- Output 2 & 4 can be operated simultaneously

Ports that cannot be operated simultaneously:

- Output 1 & 2 cannot be operated simultaneously
- Output 3 & 4 cannot be operated simultaneously

