


ORO.2717 | Horizontal Thermostatic Mixer with 2 Output Valve - 3/4"

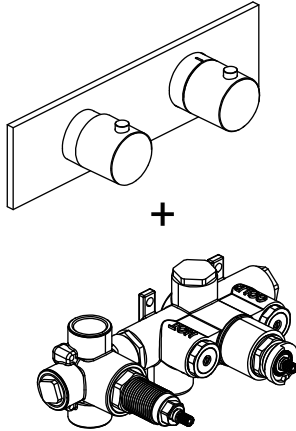


SPECIFICATIONS:


- Turn right knob to control temperature.
- Turn left knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E**

Valve [JVH.2717F] + Trim [ORO.2693T**]

Technical Diagram

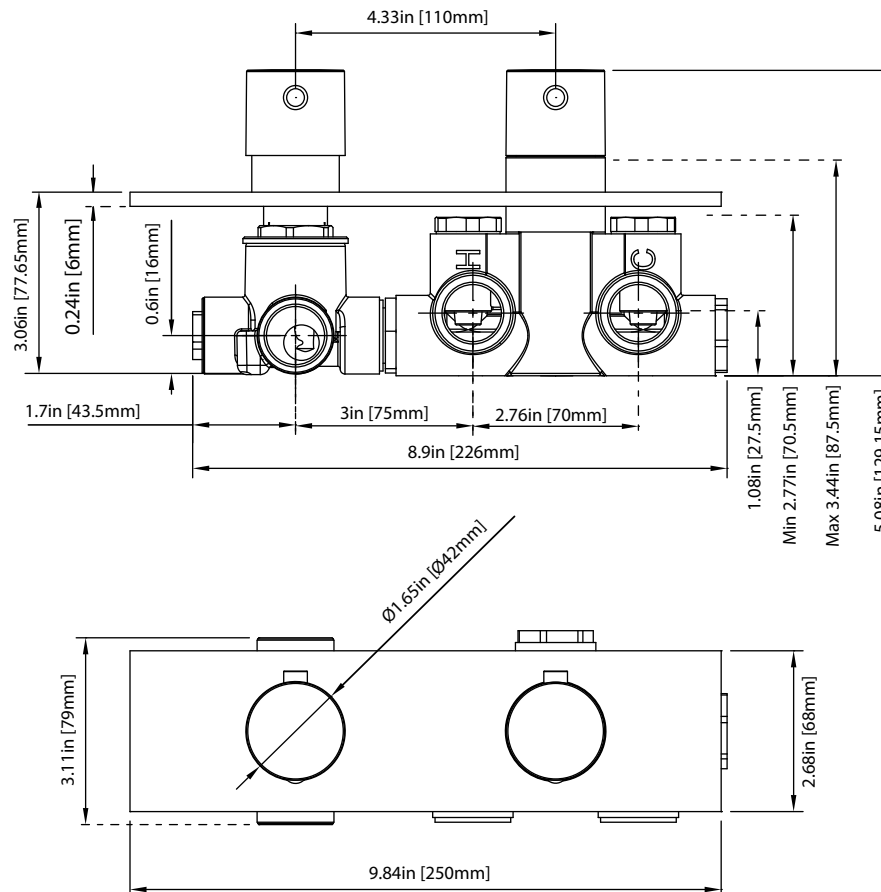

JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2


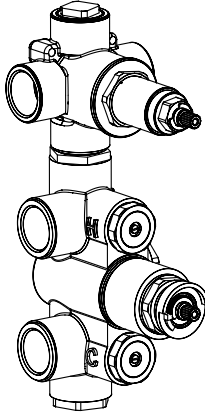


SPECIFICATIONS:


- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E**

! A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

Technical Diagram

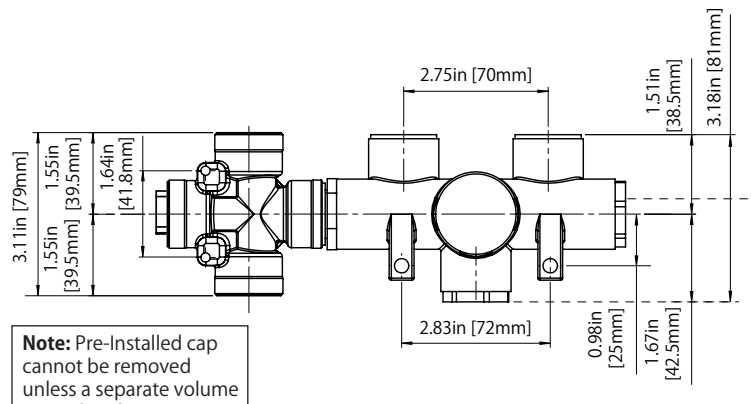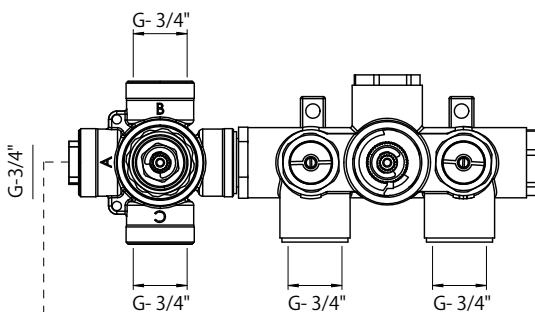

Note: Pre-Installed cap cannot be removed unless a separate volume control or diverter is used

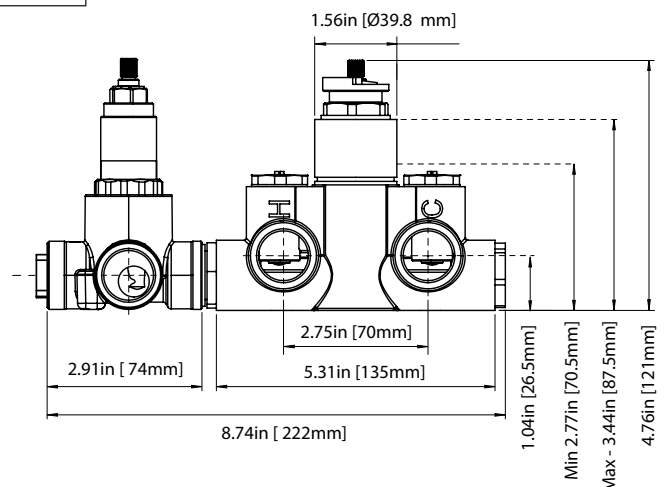


JVH.2717F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2

TWO OUPTUT - CAL-GREEN - NO SHARED PORT OPERATION

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output C Activated

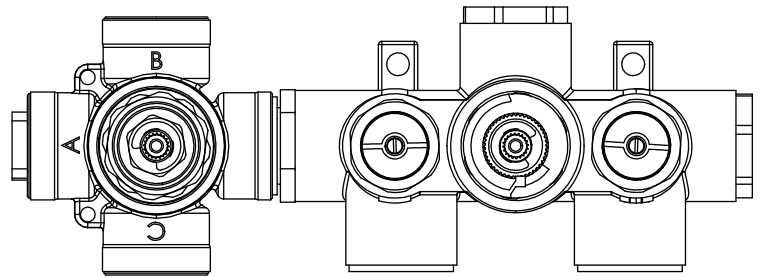

TWO OUPTUT - SHARED PORT OPERATION

Diverter Cartridge # - **15103** (Not Included)

Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output B+C Activated
- Position 3 - Output C Activated