


## RHE.7050 | Two Output Shower W/ Rain Head & Hand Held

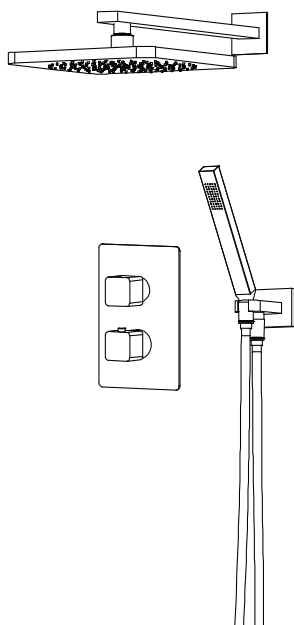

### COMPONENTS

- HH1050 - 15" Shower Arm
- RHB.10C - 8" Shower Head
- RHE.4000T - Shower Trim
- JVH.4420F - Shower Valve
- HH1003 - Hand Shower Set

### SHOWER VALVE:

- Thermostatic shower valve
- Valve includes service stops
- Turn bottom handle to set temp.
- Top handle controls water diversion
- No shared ports

### SHOWER HEAD:

- Solid brass construction
- 11 LPM flow rate

### HAND SHOWER:


- Solid Brass construction
- 6 LPM flow rate
- With back flow prevention check valve

See individual component specification sheets on following pages for further details.


## HH1050 | Square Shower Arm - 15"

### SPECIFICATIONS:


- Solid Brass Shower Arm
- With Fixed Flange



### Technical Diagram

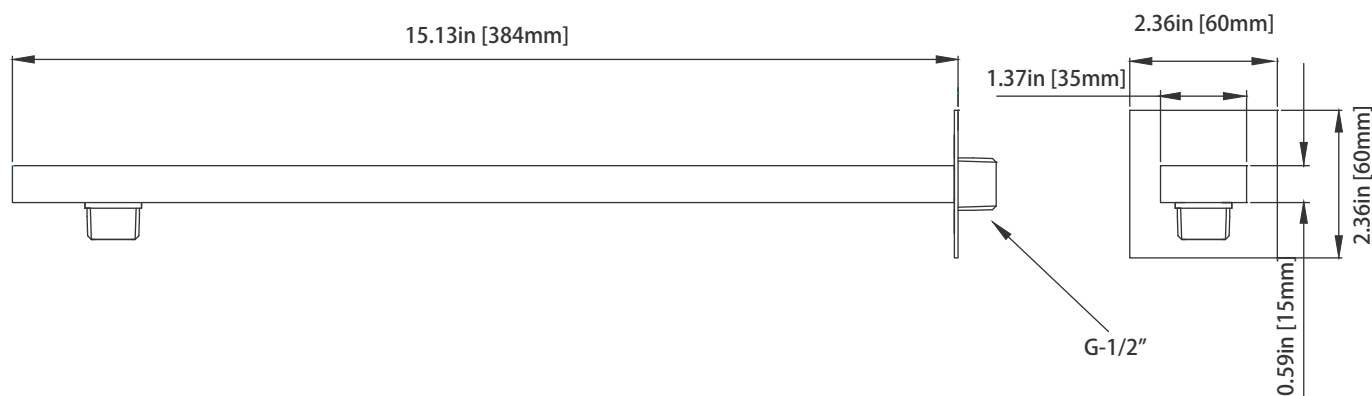



## RHB.10C | 10" Brass Rain Shower

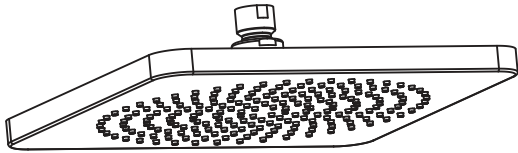


### SPECIFICATIONS:

- Solid Brass Shower Head
- Scrub rubber nozzles to easily clean water sediment
- 11 LPM Flow Rate
- 200 Nozzles
- Use with HH1050 Shower Arm

### Technical Diagram

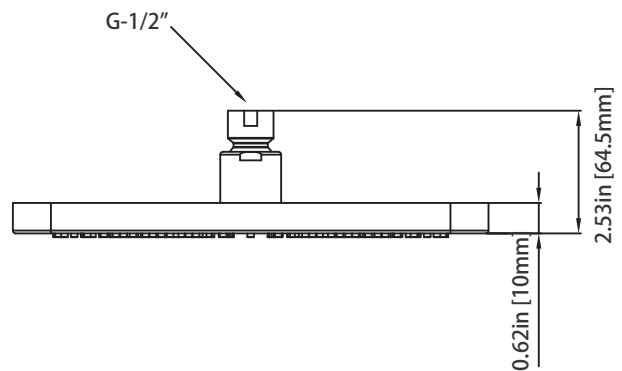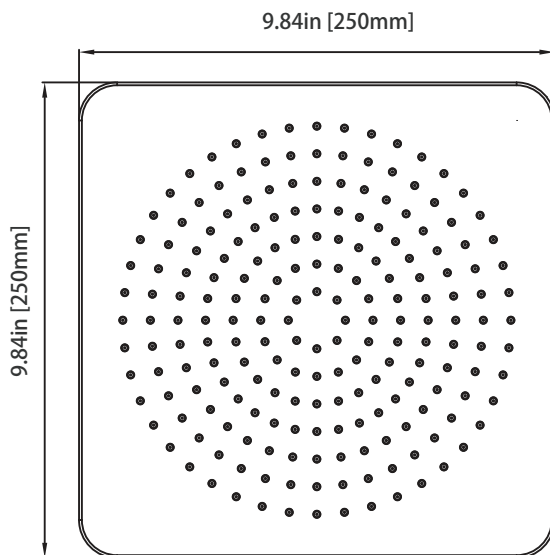


## RHE.4000T | Thermostatic Shower Trim

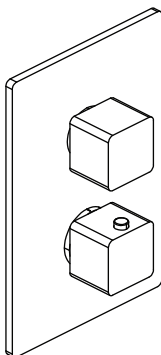

### SPECIFICATIONS:

- Solid Brass construction
- Valve not included - trim only
- Turn bottom handle to control temperature.
- Turn top handle to divert water & control volume
- Extension Available - JVH.4101E\*\*


### Technical Diagram

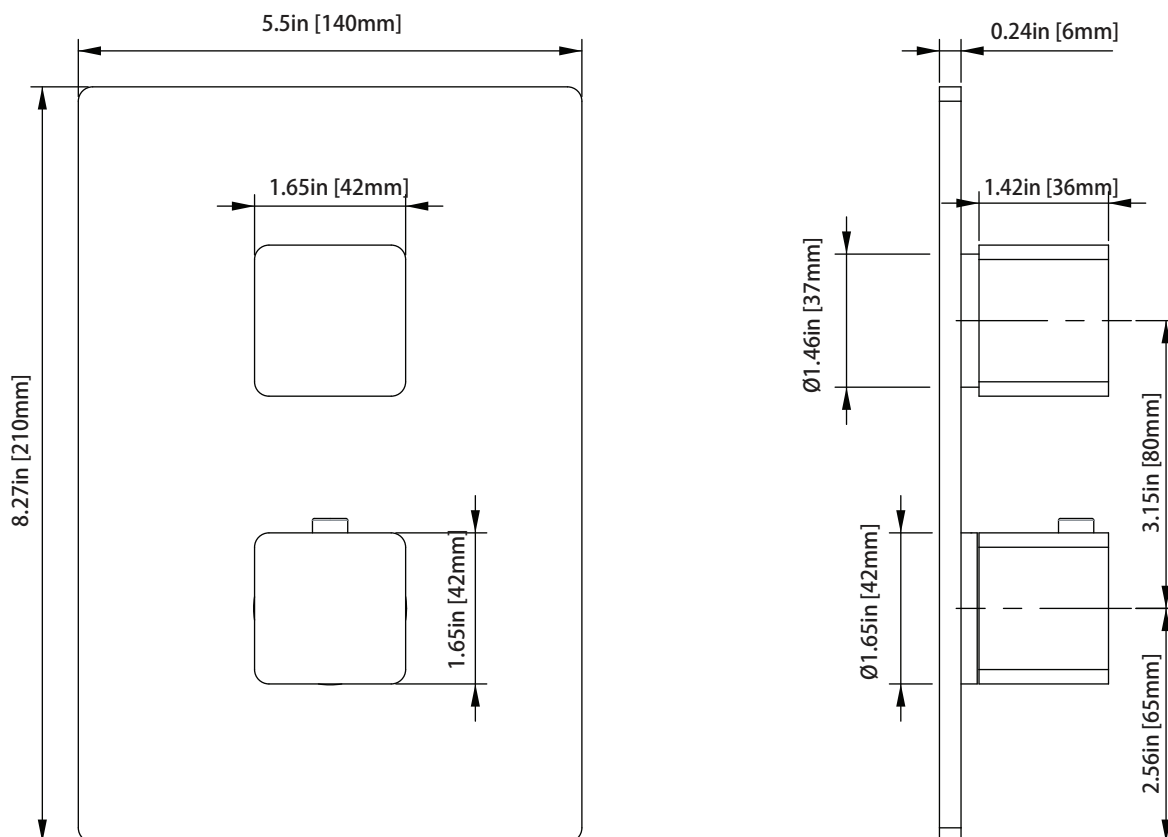

## JVH.4420F | 3/4" Thermostatic Mixer Valve - 2 Output Page 1 of 2


### SPECIFICATIONS:

- Turn bottom knob to control temperature.
- Turn top knob to control water flow.
- Thermostatic Valve Flow Rate - 22 LPM @ 3 BAR
- Extension Available - JVH.4101E\*\*



**!** A separate volume control is **not** needed to turn water supply off. Volume control functionality is integrated within this valve.

### Technical Diagram

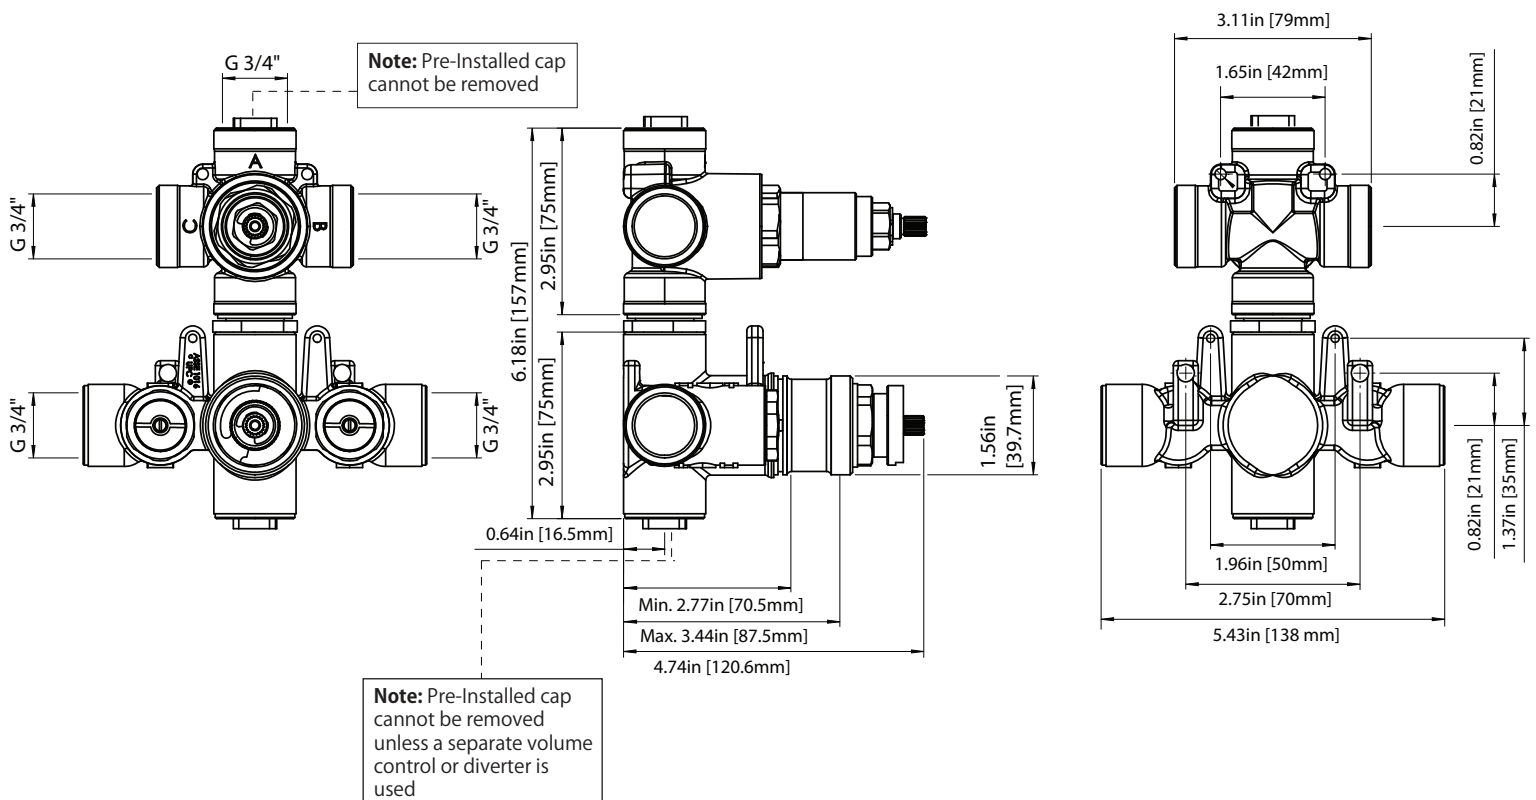


## JVH.4420F | 3/4" Thermostatic Mixer Valve - 2 Output Page 2 of 2

### TWO OUTPUT - NO SHARED PORT OPERATION

Diverter Cartridge # - **15109** (Included)

Total 3 Positions as defined below, with **only** 1 port active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output C Activated

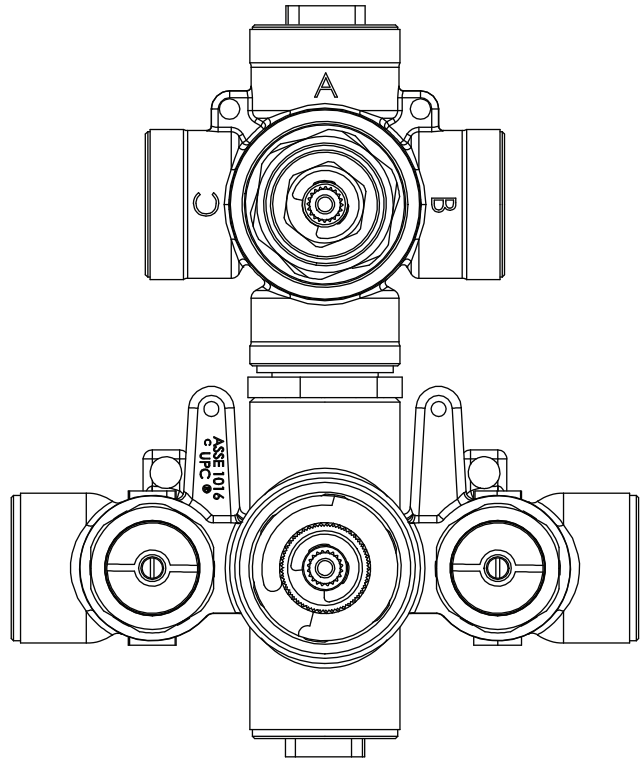


### TWO OUTPUT - SHARED PORT OPERATION

Diverter Cartridge # - **15103** (Not Included)


Total 4 Positions as defined below, with 2 ports active at one time.

- Position 0 - Off - No Water Flow
- Position 1 - Output B Activated
- Position 2 - Output B+C Activated
- Position 3 - Output C Activated

### Water Diversion Diagram

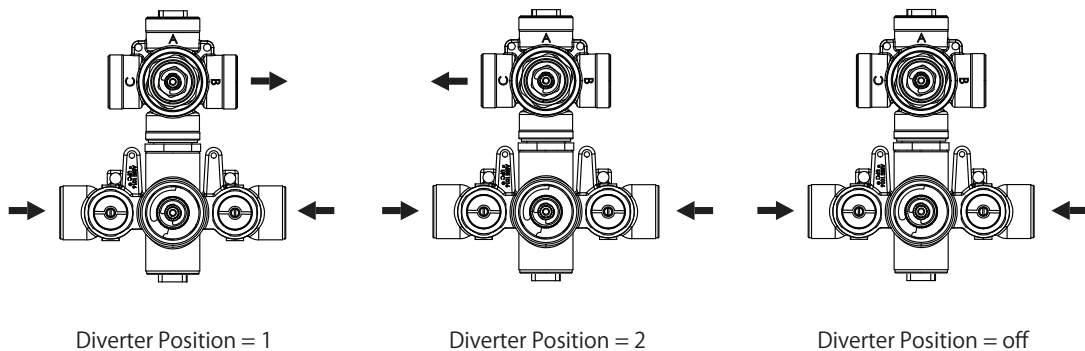

## HH1003 | Solid Brass Hand Shower Set



### SPECIFICATIONS:

- Solid Brass construction
- Single function hand held
- 1/2" male elbow connection
- Includes check valve with back-flow prevention
- 6 LPM Flow Rate

### Technical Diagram

